



Certificate

RECEIVED

JUL 08 2004

Technology Center 2600

I, Yuko Yagi, a member of Hayase & Company patent attorneys of 13F, NISSAY SHIN-OSAKA Bldg., 3-4-30, Miyahara, Yodogawa-ku, Osaka-shi, Osaka 532-0003 Japan, hereby certify that to the best of my knowledge and belief the following is a true translation into English made by me of the Japanese patent application 11-201120.

Osaka, this 22<sup>nd</sup> day of June, 2004

Yuko Yagi  
Yuko Yagi

11-201120

[Name of Document] Patent Application  
[Reference Number] 2892010113  
[Filed Date] July 15, 1999  
[Destination] Commissioner, Patent Office  
[International Patent Classification] G06T 3/40  
[Inventor]

[Address] c/o Matsushita-kotobuki Electric  
Industries., Ltd. 8-1 Furujin-cho,  
Takamatsu-shi, Kagawa JAPAN

[Name] Shinichi Takarada

[Applicant]

[Identification No.] 000005821

[Name] Matsushita Electric Industrial Co., Ltd.

[Patent Attorney]

[Identification No.] 100081813

[Patent Attorney]

[Name] Kenichi Hayase

[Telephone Number] 06(6380)5822

[Representation of Fee]

[Ledger No.] 013527

[Amount of Payment] ¥21,000

[Attached Documents]

[Name of Document] Specification 1

[Name of Document] Drawing 1

[Name of Document] Abstract 1

[Number of General Authorization] 9600402

[Name of Document] Specification

[Title of Invention] IMAGE PROCESSOR, IMAGE PROCESSING METHOD,  
AND IMAGE PROCESSING PROGRAM RECORDING MEDIUM

[Claims]

[Claim 1] The image processing apparatus which converts a low-resolution image to a high-resolution image comprising:

a pixel selection means for selecting a pixel of interest which is located at a position closest to a pixel for interpolation to be newly generated between pixels (hereinafter, simply referred to as "new pixel") and adjacent pixels adjacent the pixel of interest from the pixels of the low-resolution image, respectively, and;

new pixel data calculation means for calculating the difference between the adjacent pixels putting between the pixel of interest, obtaining the amending value on the basis of the difference and the distance between the pixel of interest and the new pixel, and calculating the data value of the new pixel on the basis of the data of the pixel of interest, the difference, and the amending value.

[Claim 2] The image processing method which converts a low-resolution image to a high-resolution image including:

a pixel selection step for selecting a pixel of interest which is located at a position closest to a pixel for interpolation to be newly generated between pixels (hereinafter, simply referred to as "new pixel") and adjacent

pixels adjacent the pixel of interest, respectively, from the pixels of the low-resolution image, and;

new pixel data calculation step for obtaining the difference between the adjacent pixels putting between the pixel of interest , obtaining the amending value on the basis of the difference and the distance between the pixel of interest and the new pixel, and calculating the data value of the new pixel on the basis of the data of the pixel of interest, the difference, and the amending value.

[Claim 3] The image processing program recording medium having stored an image processing program performing conversion of a low-resolution image into a high-resolution image therein, which program includes:

a pixel selection step for selecting a pixel of interest which is located at a position closest to a pixel for interpolation to be newly generated between pixels (hereinafter, simply referred to as "new pixel") and adjacent pixels adjacent the pixel of interest, from the pixels of the low-resolution image, respectively; and

a new pixel data calculation step for obtaining the difference between the adjacent pixels putting between the particular pixel, obtaining the amending value on the basis of the difference and the distance between the pixel of interest and the new pixel, and calculating the data value of the new pixel on the basis of the data of the pixel of interest, the

difference, and the amending value.

[Claim 4] The image processor as defined in Claim 1 wherein:

the pixel selection means is one which selects,

data A of the pixel of interest of the low-resolution image, located at a position closest to a pixel for interpolation to be newly created (hereinafter, referred to as "new pixel") between pixels of the low-resolution image having distances of "1" between adjacent pixels,

data B of upper pixel of the low-resolution image adjacent the pixel of interest at upper side thereof,

data C of lower pixel of the low-resolution image adjacent the picture of interest at lower side thereof,

data D of left pixel of the low-resolution image adjacent the pixel of interest at left side thereof,

and data E of right pixel of the low-resolution image adjacent the pixel of interest at right side thereof; and

the new pixel data calculation means is one which calculates data F of new pixel composing the high-resolution image by a formula of  $F = A + (i/2) (E - D) + (j/2) (C - B)$ ,

on the basis of data A of pixel of interest, data B of upper pixel, data C of lower pixel, data D of left pixel, data E of right pixel, and the position of the new pixel (i, j) which are represented by a distance "i" in the horizontal direction and a distance "j" in the vertical direction from the pixel of interest to the new pixel.

[Claim 5] The image processing method as defined in Claim 2, wherein:

the pixel selection process is one which selects data A of the pixel of interest of the low-resolution image, located at a position closest to a pixel for interpolation to be newly created (hereinafter, referred to as "new pixel") between pixels of the low-resolution image having distances of "1" between adjacent pixels,

data B of upper pixel of the low-resolution image adjacent the pixel of interest at upper side thereof,

data C of lower pixel of the low-resolution image adjacent the pixel of interest at lower side thereof,

data D of left pixel of the low-resolution image adjacent the pixel of interest at left side thereof, and

data E of right pixel of the low-resolution image adjacent the pixel of interest at right side thereof; and

the new pixel data calculation process is one which calculates data F of new pixel composing the high-resolution image by a formula of  $F=A+(i/2) (E-D) + (j/2) (C-B)$ ,

on the basis of data A of pixel of interest, data B of upper pixel, data C of lower pixel, data D of left pixel, data E of right pixel, the position of the new pixel (i, j) which is represented by a distance "i" in the horizontal direction and a distance "j" in the vertical direction from the pixel of interest to the new pixel.

[Claim 6] The image processing recording medium as defined in Claim 3, wherein:

the pixel selection process is one which selects data A of the pixel of interest of the low-resolution image, located at a position closest to a pixel for interpolation to be newly created (hereinafter, referred to as "new pixel") between pixels of the low-resolution image having distances of "1" between adjacent pixels,

data B of upper pixel of the low-resolution image adjacent the pixel of interest at upper side thereof,

data C of lower pixel of the low-resolution image adjacent the pixel of interest at lower side thereof,

data D of left pixel of the low-resolution image adjacent the pixel of interest at left side thereof, and

data E of right pixel of the low-resolution image adjacent the pixel of interest at right side thereof; and

the new pixel data calculation process is one which calculates data F of new pixel composing the high-resolution image by a formula of  $F = A + (i/2) (E - D) + (j/2) (C - B)$ ,

on the basis of data A of pixel of interest, data B of upper pixel, data C of lower pixel, data D of left pixel, data E of right pixel, the position of the new pixel (i, j) which is represented by a distance "i" in the horizontal direction and a distance "j" in the vertical direction from the pixel of interest to the new pixel.

[Claim 7] The image processor as defined in Claim 4, wherein:

when generating the high-resolution image having twice number of pixels in each of the horizontal and vertical direction for the low-resolution image,

the position of new pixel is set by making the absolute value of the distance "i" in the horizontal direction and that of the distance "j" in the vertical direction from the pixel of interest be  $1/4$ , respectively, and

the new pixel data calculating means is one which, when calculating data  $F_1$ ,  $F_2$ ,  $F_3$  and  $F_4$  of the new pixel located at upper left, upper right, lower left, lower right of the pixel of interest, respectively, by  $F=A+(i/2)(E-D)+(j/2)(C-B)$ , previously calculates  $X=(i/2)(E-D)$  and  $Y=(j/2)(C-B)$  and then calculates  $F_1=A-X-Y$ ,  $F_2=A+X-Y$ ,  $F_3=A-X+Y$ , and  $F_4=A+X+Y$ .

[Claim 8] The image processing method as defined in Claim 5, wherein:

when generating the high-resolution image having twice number of pixels in both the horizontal and vertical direction for the low-resolution image,

the position of new pixel is set by making the absolute values of the distance "i" in the horizontal direction and the distance "j" in the vertical direction from the pixel of interest be  $1/4$ , respectively, and

the new pixel data calculating process is one which, when calculating data  $F_1$ ,  $F_2$ ,  $F_3$  and  $F_4$  of the new pixel located



at upper left, upper right, lower left, lower right of the pixel of interest, respectively, by  $F=A+(i/2)(E-D)+(j/2)(C-B)$ , previously calculates  $X=(i/2)(E-D)$  and  $Y=(j/2)(C-B)$  and then calculates  $F1=A-X-Y$ ,  $F2=A+X-Y$ ,  $F3=A-X+Y$ , and  $F4=A+X+Y$ .

[Claim 9] The image processing program recording medium as defined in Claim 6, wherein:

when generating the high-resolution image having twice number of pixels in both the horizontal and vertical direction for the low-resolution image,

the position of new pixel is made by setting the absolute values of the distance "i" in the horizontal direction and the distance "j" in the vertical direction from the pixel of interest be  $1/4$ , respectively, and

the new pixel data calculating process is one which, when calculating data  $F1$ ,  $F2$ ,  $F3$  and  $F4$  of the new pixel located at upper left, upper right, lower left, lower right of the pixel of interest, respectively, by  $F=A+(i/2)(E-D)+(j/2)(C-B)$ , previously calculates  $X=(i/2)(E-D)$  and  $Y=(j/2)(C-B)$  and then calculates  $F1=A-X-Y$ ,  $F2=A+X-Y$ ,  $F3=A-X+Y$ , and  $F4=A+X+Y$ .

[Claim 10] The image processor as defined in Claim 1, wherein:

the pixel selection means is one which selects data A of pixel of interest located at a position closest to a pixel for interpolation to be newly generated (hereinafter, simply referred to as "new pixel") between pixels of low-resolution

image having a distance between adjacent pixels being "1",  
data B of upper pixel of low-resolution image adjacent  
at upper side of the pixel of interest,

data C of lower pixel of low-resolution image adjacent  
at lower side of the pixel of interest, and

the new pixel data calculation means is one which  
calculates data F of the new pixel by a formula of  $F=A+(j/2)(C-B)$  on the basis of the data A of pixel of interest, data B of upper pixel, data C of lower pixel and the distance "j" in the vertical direction from the pixel of interest to the new pixel.

[Claim 11] The image processing method as defined in Claim 2, wherein:

the pixel selection process is one which selects data A of pixel of interest located at a position closest to a pixel for interpolation to be newly generated (hereinafter, simply referred to as "new pixel") between pixels of low-resolution image having a distance between adjacent pixels being "1",

data B of upper pixel of low-resolution image adjacent  
at upper side of the pixel of interest,

data C of lower pixel of low-resolution image adjacent  
at lower side of the pixel of interest, and

the new pixel data calculation process is one which  
calculates data F of the new pixel by a formula of  $F=A+(j/2)(C-B)$  on the basis of the data A of pixel of interest, data

B of upper pixel, data C of lower pixel, and the distance "j" in the vertical direction from the pixel of interest to the new pixel.

[Claim 12] The image processing program recording medium as defined in Claim 3, wherein:

the pixel selection process is one which selects data A of pixel of interest located at a position closest to a pixel for interpolation to be newly generated (hereinafter, simply referred to as "new pixel") between pixels of low-resolution image having a distance between adjacent pixels being "1",

data B of upper pixel of low-resolution image adjacent at upper side of the pixel of interest,

data C of lower pixel of low-resolution image adjacent at lower side of the pixel of interest, and

the new pixel data calculation process is one which calculates data F of the new pixel by a formula of  $F = A + (j/2)(C - B)$  on the basis of the data A of pixel of interest, data B of upper pixel, data C of lower pixel and the distance "j" in the vertical direction from the pixel of interest to the new pixel.

[Claim 13] The image processor as defined in Claim 10, wherein:

when generating the high-resolution image having twice number of pixels in the vertical direction for the low-resolution image, the position of new pixel is made by setting

the absolute value of the distance "j" in the vertical direction from the pixel of interest be  $1/4$ , and

the new pixel data calculation means is one which, when calculating data F5 and F6 of new pixel which are adjacent at upper and lower of the pixel of interest, respectively, by a formula of  $F=A+(j/2)(C-B)$ , calculates  $Y=(j/2)(C-B)$  previously, and then calculates  $F5=A-X$  and  $F6=A+Y$ .

[Claim 14] The image processing method as defined in Claim 11, wherein:

when generating high-resolution image having twice number of pixels in the vertical direction for said low-resolution image, the position of new pixel is made have the absolute value of a distance "j" in the vertical direction from the pixel of interest being  $1/4$ , and

the new pixel data calculation process is one which, when calculating the data F5 and F6 of the new pixel located at upper and lower of the pixel of interest, respectively, by a formula of  $F=A+(j/2)(C-B)$ , previously calculates  $Y=(j/2)(C-B)$ , and then calculates  $F5=A-X$  and  $F6=A+Y$ .

[Claim 15] The image processing program recording medium as defined in Claim 12, wherein:

when generating the high-resolution image having twice number of pixels in the vertical direction for the low-resolution image, the position of the new pixel is made have the absolute value of a distance "j" in the vertical direction

from the pixel of interest be  $1/4$ , and the new pixel data calculation process is one which, when calculating data  $F5$  and  $F6$  of the new pixel located at upper and lower of the pixel of interest, respectively, by a formula of  $F=A+(j/2)(C-B)$ , previously calculates  $Y=(j/2)(C-B)$  and then calculates  $F5=A-X$  and  $F6=A+Y$ .

[Detailed Description of the Invention]

[0001]

[Applicable Field in the Industry]

The present invention relates to an image processor, an image processing method and an image processing program recording medium and, more particularly, to those which can enlarge an image which has tone in each pixel by performing resolution conversion with easy arithmetic processing and obtain a high-quality resolution image while enlarging the same. For example, it relates to those which are suitable for being applied in an image output apparatus such as a printer for outputting input image information with interpolating or a display unit for performing a screen display equivalent that is equivalent to Hi-Vision image display with interpolating a current NTSC video signal.

[0002]

[Prior Art]

Figure 14 illustrates an example of a condition in which this type image processor is used. In the figure, numeral 1401

denotes a PC(personal computer), 1402 denotes an image processor for enlarging an image that is output from the PC, and 1403 denotes an LCD projector for displaying the output of the image processor 1402.

[0003]

Video signal is output in such as  $640 \times 480$  pixels from the monitor output line of PC 1401. The image processor 1402 for performing resolution conversion is connected between them so as to display the video signal on the LCD projector 1403 which has a resolution of such as  $1280 \times 960$  pixels.

[0004]

Thereby, a low-resolution image output from PC 1401 is converted to a high-resolution image, and even when an image of a PC is subjected to an enlarged projection display on a screen by the LCD projector 1403, the projected image is prevented from being roughly displayed.

[0005]

Various methods have been proposed for resolution conversion processing which enlarge a low-resolution image with interpolating. The most common method is a linear interpolation for linearly interpolating intensity of new pixels from peripheral original pixels.

[0006]

Figure 4 is a diagram showing an interpolation position of pixels according to the conventional linear interpolation

method.

In figure 4, numeral 401 denotes an original pixel with intensity G, 402 denotes an original pixel with intensity H, 403 denotes an original pixel with intensity I and 404 is an original pixel with intensity J. The interval between these original pixels of low-resolution image, that is, the interval between adjacent pixels in each of the horizontal or vertical directions is "1". Numeral 405 denotes a new pixel with intensity K which is obtained by conventional linear interpolation. "m" presents the distance from the original pixel 401 to the new pixel 405 in the vertical direction, "n" presents the distance from the original pixel 401 to the new pixel 405 in the horizontal direction, and these distances "m" and "n" are assumed to be  $0 \leq m < 1$  and  $0 \leq n < 1$ .

[0007]

The intensity K of new pixel will be calculated by the following equation.

$$K = (1-m)((1-n)G + nH) + m((1-n)I + nJ)$$

According to the conventional linear interpolation, it performs interpolation by linear interpolation and the required operation times for calculating the new pixel is six times of multiplication and five times of adding and subtraction.

[0008]

In the conventional linear interpolation, there is a

problem in that an image is smoothed by averaging processing with peripheral original pixels, thereby resulting in blurred images with the edge parts thereof lacking in sharpness.

[0009]

There is an image processor disclosed in the Japanese Published Patent Application No.7-93531 which can solve the problems that the edge parts of image is blurred by averaging processing. The image processor is the one which performs linear interpolation arithmetic as well as performing smoothing after adding arithmetic processing for creating edges in accordance with the condition of peripheral images, thereby the edge parts are cleared, resulting in high-quality images.

[0010]

However, the image processor disclosed in Japanese Published Patent Application 7-93531 has a problem in that the entire processing time is increased as well as the device becomes costly when constructed in hardware, because it requires an edge making arithmetic processing in addition to the linear interpolation.

[0011]

Further, when a low-resolution image is interpolated and converted to a high-resolution image, in particular, to an image having twice number of pixels in each of the vertical and horizontal directions, the amount of arithmetic processing



can be reduced by devising the pixel arrangement. The arrangement in this case will be described with referring to figure 6.

[0012]

Figure 6 is a diagram showing pixel arrangement at performing resolution conversion to twice number of pixels in each of the vertical and horizontal directions by conventional image processing method.

[0013]

In figure 6, "○" designates an original pixel of low-resolution image, and "□" designates a new pixel of high-resolution image. The pixel arrangement in the figure 6 omits arithmetic processing for calculating the intensity of a new pixel 604 by matching the position of an original pixel 601 with the position of new pixel 604, and matching also for their intensity. In addition, a new pixel 606 is calculated based upon the original pixel 601 and the original pixel 602, and a new pixel 610 is calculated based upon new pixels 606, 607, 608 and 609.

[0014]

According to the pixel arrangement in figure 6, though the intensity of new pixel 604 which corresponds to the original pixel 601 includes no error, the intensity value of new pixel 606 which is calculated based upon the original pixels 601 and 602 may include an error, further, the intensity value of new

pixel 610 which is calculated based upon the new pixel 606 may include a greater error. Thus, there arises an interpolation result in which the appearance probability of error varies depending on intensity of new pixel.

[0015]

[Problems to be solved by the invention]

As mentioned above, the conventional image processing method for converting a low-resolution image to a high-resolution image performs averaging of the intensity of original pixels at periphery of new pixel, thereby resulting in a problem that an interpolated image is smoothed and results in blurred images in which edge parts thereof lost sharpness.

[0016]

Further, the image processor disclosed in Japanese Published Patent Application 7-93531 has a problem in that the entire processing time becomes longer due to an edge making arithmetic processing and a problem in that it becomes costly when it is produced in hardware.

[0017]

Further, in a case where a pixel arrangement is devised so as to decrease the amount of arithmetic processing, there may be a case in which the appearance probability of an error of pixel data varies depending on pixels.

[0018]

The present invention is made to solve the problems and

has for its object to provide an image processor, an image processing method and an image processing program recording medium which can obtain high-quality image with sharpness which requires few amount of interpolation arithmetic so as to improve an image resolution, short processing time, and a small scaled hardware, and further, which can make uniform the appearance probability of error of pixel data in a case where a pixel arrangement is performed so as to minimize the amount of arithmetic processing.

[0019]

[Measures to Solve the Problems]

In order to solve the problems, the image processing apparatus according to Claim 1 of the present invention provides an image processor which converts a low-resolution image to a high-resolution image that includes a pixel selection means for selecting a pixel of interest which is located at a position closest to a pixel for interpolation to be newly generated between pixels (hereinafter, simply referred to as "new pixel") and adjacent pixels adjacent to the pixel of interest from the pixels of the low-resolution image, respectively, and new pixel data calculation means for calculating the difference between the adjacent pixels putting between the pixel of interest, obtaining the amending value on the basis of the difference and the distance between the pixel of interest and the new pixel, and calculating the data

value of the new pixel on the basis of the data of the pixel of interest, the difference, and the amending value.

[0020]

The image processing method according to Claim 2 of the present invention provides an image processing method which converts a low-resolution image to a high-resolution image that includes a pixel selection step for selecting a pixel of interest which is located at a position closest to a pixel for interpolation to be newly generated between pixels (hereinafter, simply referred to as "new pixel") and adjacent pixels adjacent the pixel of interest, respectively, from the pixels of the low-resolution image, and new pixel data calculation step for obtaining the difference between the adjacent pixels putting between the pixel of interest , obtaining the amending value on the basis of the difference and the distance between the pixel of interest and the new pixel, and calculating the data value of the new pixel on the basis of the data of the pixel of interest, the difference, and the amending value.

[0021]

The image processing program recording medium according to Claim 3 of the present invention has stored an image processing program performing conversion of a low-resolution image into a high-resolution image therein, which program includes a pixel selection step for selecting a pixel of

interest which is located at a position closest to a pixel for interpolation to be newly generated between pixels (hereinafter, simply referred to as "new pixel") and adjacent pixels adjacent to the pixel of interest, from the pixels of the low-resolution image, respectively, and new pixel data calculation step for obtaining the difference between the adjacent pixels putting between the particular pixel, obtaining the amending value on the basis of the difference and the distance between the pixel of interest and the new pixel, and calculating the data value of the new pixel on the basis of the data of the pixel of interest, the difference, and the amending value.

[0022]

The image processor according to Claim 4 of the present invention provides an image processor according to Claim 1 in which the pixel selection means is one which selects data A of the pixel of interest of the low-resolution image, located at a position closest to a pixel for interpolation to be newly created (hereinafter, referred to as "new pixel") between pixels of the low-resolution image having distances of "1" between adjacent pixels, data B of upper pixel of the low-resolution image adjacent to the pixel of interest at upper side thereof, data C of lower pixel of the low-resolution image adjacent to the picture of interest at lower side thereof, data D of left pixel of the low-resolution image adjacent to the

pixel of interest at left side thereof, and data E of right pixel of the low-resolution image adjacent the pixel of interest at right side thereof, and the new pixel data calculation means is one which calculates data F of new pixel composing the high-resolution image by a formula of  $F = A + (i/2)(E - D) + (j/2)(C - B)$  on the basis of data A of pixel of interest, data B of upper pixel, data C of lower pixel, data D of left pixel, data E of right pixel, the position of the new pixel (i, j) which are represented by a distance "i" in the horizontal direction and a distance "j" in the vertical direction from the pixel of interest to the new pixel.

[0023]

The image processing method according to Claim 5 of the present invention provides an image processing method according to Claim 2 in which the pixel selection process is one which selects data A of the pixel of interest of the low-resolution image, located at a position closest to a pixel for interpolation to be newly created (hereinafter, referred to as "new pixel") between pixels of the low-resolution image having distances of "1" between adjacent pixels, data B of upper pixel of the low-resolution image adjacent the pixel of interest at upper side thereof, data C of lower pixel of the low-resolution image adjacent the pixel of interest at lower side thereof, data D of left pixel of the low-resolution image adjacent the pixel of interest at left side thereof, and data

E of right pixel of the low-resolution image adjacent the pixel of interest at right side thereof, and the new pixel data calculation process is one which calculates data F of new pixel composing the high-resolution image by a formula of  $F = A + (i/2)(E - D) + (j/2)(C - B)$  on the basis of data A of pixel of interest, data B of upper pixel, data C of lower pixel, data D of left pixel, data E of right pixel, the position of the new pixel (i, j) which is represented by a distance "i" in the horizontal direction and a distance "j" in the vertical direction from the pixel of interest to the new pixel.

[0024]

The image processing recording medium according to Claim 6 provides an image processing recording medium according to Claim 3 in which the pixel selection process is one which selects data A of the pixel of interest of the low-resolution image, located at a position closest to a pixel for interpolation to be newly created (hereinafter, referred to as "new pixel") between pixels of the low-resolution image having distances of "1" between adjacent pixels, data B of upper pixel of the low-resolution image adjacent the pixel of interest at upper side thereof, data C of lower pixel of the low-resolution image adjacent the pixel of interest at lower side thereof, data D of left pixel of the low-resolution image adjacent the pixel of interest at left side thereof, and data E of right pixel of the low-resolution image adjacent the pixel

of interest at right side thereof, and the new pixel data calculation process is one which calculates data F of new pixel composing the high-resolution image by a formula of  $F=A+(i/2)(E-D) + (j/2)(C-B)$  on the basis of data A of pixel of interest, data B of upper pixel, data C of lower pixel, data D of left pixel, data E of right pixel, the position of the new pixel (i, j) which is represented by a distance "i" in the horizontal direction and a distance "j" in the vertical direction from the pixel of interest to the new pixel.

[0025]

The image processor according to Claim 7 of the present invention provides an image processor according to Claim 4 in which when generating the high-resolution image having twice number of pixels in each of the horizontal and vertical direction for the low-resolution image, the position of new pixel is set by making the absolute value of the distance "i" in the horizontal direction and that of the distance "j" in the vertical direction from the pixel of interest be 1/4, respectively, and the new pixel data calculating means is one which, when calculating data F1, F2, F3 and F4 of the new pixel located at upper left, upper right, lower left, lower right of the pixel of interest, respectively, by  $F=A+(i/2)(E-D)+(j/2)(C-B)$ , previously calculates  $X=(i/2)(E-D)$  and  $Y=(j/2)(C-B)$  and then calculates  $F1=A-X-Y$ ,  $F2=A+X-Y$ ,  $F3=A-X+Y$ , and  $F4=A+X+Y$ .



[0026]

The image processing method according to Claim 8 provides an image processing method according to Claim 5 in which when generating the high-resolution image having twice number of pixels in both the horizontal and vertical direction for the low-resolution image, the position of new pixel is set by making the absolute values of the distance "i" in the horizontal direction and the distance "j" in the vertical direction from the pixel of interest be 1/4, respectively, and the new pixel data calculating process is one which, when calculating data F1, F2, F3 and F4 of the new pixel located at upper left, upper right, lower left, lower right of the pixel of interest, respectively, by  $F=A+(i/2)(E-D)+(j/2)(C-B)$ , previously calculates  $X=(i/2)(E-D)$  and  $Y=(j/2)(C-B)$  and then calculates  $F1=A-X-Y$ ,  $F2=A+X-Y$ ,  $F3=A-X+Y$ , and  $F4=A+X+Y$ .

[0027]

The image processing program recording medium according to Claim 9 of the present invention provides an image processing recording medium according to Claim 6, in which when generating the high-resolution image having twice number of pixels in both the horizontal and vertical direction for the low-resolution image, the position of new pixel is made by setting the absolute values of the distance "i" in the horizontal direction and the distance "j" in the vertical direction from the pixel of interest be 1/4, respectively, and

the new pixel data calculating process is one which, when calculating data  $F_1$ ,  $F_2$ ,  $F_3$  and  $F_4$  of the new pixel located at upper left, upper right, lower left, lower right of the pixel of interest, respectively, by  $F=A+(i/2)(E-D)+(j/2)(C-B)$ , previously calculates  $X=(i/2)(E-D)$  and  $Y=(j/2)(C-B)$  and then calculates  $F_1=A-X-Y$ ,  $F_2=A+X-Y$ ,  $F_3=A-X+Y$ , and  $F_4=A+X+Y$ .

[0028]

The image processor according to Claim 10 provides an image processor according to Claim 1 in which the pixel selection means is one which selects data A of pixel of interest located at a position closest to a pixel for interpolation to be newly generated (hereinafter, simply referred to as "new pixel") between pixels of low-resolution image having a distance between adjacent pixels being "1", data B of upper pixel of low-resolution image adjacent at upper side of the pixel of interest, data C of lower pixel of low-resolution image adjacent at lower side of the pixel of interest, and the new pixel data calculation means is one which calculates data F of the new pixel by a formula of  $F=A+(j/2)(C-B)$  on the basis of the data A of pixel of interest, data B of upper pixel, data C of lower pixel and the distance "j" in the vertical direction from the pixel of interest to the new pixel.

[0029]

The image processing method according to Claim 11 of the present invention provides an image processing method

according to Claim 2 in which the pixel selection process is one which selects data A of pixel of interest located at a position closest to a pixel for interpolation to be newly generated (hereinafter, simply referred to as "new pixel") between pixels of low-resolution image having a distance between adjacent pixels being "1", data B of upper pixel of low-resolution image adjacent at upper side of the pixel of interest, data C of lower pixel of low-resolution image adjacent at lower side of the pixel of interest, and the new pixel data calculation process is one which calculates data F of the new pixel by a formula of  $F = A + (j/2) (C - B)$  on the basis of the data A of pixel of interest, data B of upper pixel, data C of lower pixel, and the distance "j" in the vertical direction from the pixel of interest to the new pixel.

[0030]

The image processing program recording medium according to Claim 12 of the present invention provides an image processing program recording medium according to Claim 3 in which the pixel selection process is one which selects data A of pixel of interest located at a position closest to a pixel for interpolation to be newly generated (hereinafter, simply referred to as "new pixel") between pixels of low-resolution image having a distance between adjacent pixels being "1", data B of upper pixel of low-resolution image adjacent at upper side of the pixel of interest, data C of lower pixel of low-

resolution image adjacent at lower side of the pixel of interest, and the new pixel data calculation process is one which calculates data F of the new pixel by a formula of  $F=A+(j/2)(C-B)$  on the basis of the data A of pixel of interest, data B of upper pixel, data C of lower pixel and the distance "j" in the vertical direction from the pixel of interest to the new pixel.

[0031]

The image processor according to Claim 13 of the present invention provides an image processor according to Claim 10 in which when generating the high-resolution image having twice number of pixels in the vertical direction for the low-resolution image, the position of new pixel is made by setting the absolute value of the distance "j" in the vertical direction from the pixel of interest be  $1/4$ , and the new pixel data calculation means is one which, when calculating data F5 and F6 of new pixel which are adjacent at upper and lower of the pixel of interest, respectively, by a formula of  $F=A+(j/2)(C-B)$ , calculates  $Y=(j/2)(C-B)$  previously, and then calculates  $F5=A-X$  and  $F6=A+Y$ .

[0032]

The image processing method according to Claim 14 of the present invention provides an image processing method according to Claim 11 in which, when generating high-resolution image having twice number of pixels in the vertical

direction for said low-resolution image, the position of new pixel is made to have the absolute value of a distance "j" in the vertical direction from the pixel of interest being 1/4, and the new pixel data calculation process is one which, when calculating the data F5 and F6 of the new pixel located at upper and lower of the pixel of interest, respectively, by a formula of  $F=A+(j/2)(C-B)$ , previously calculates  $Y=(j/2)(C-B)$ , and then calculates  $F5=A-X$  and  $F6=A+Y$ .

[0033]

The image processing program recording medium according to Claim 15 of the present invention provides an image processing program according to Claim 12 in which, when generating the high-resolution image having twice number of pixels in the vertical direction for the low-resolution image, the position of the new pixel is made to have the absolute value of a distance "j" in the vertical direction from the pixel of interest be 1/4, and the new pixel data calculation process is one which, when calculating data F5 and F6 of the new pixel located at upper and lower of the pixel of interest, respectively, by a formula of  $F=A+(j/2)(C-B)$ , previously calculates  $Y=(j/2)(C-B)$  and then calculates  $F5=A-X$  and  $F6=A+Y$ .

[0034]

[Embodiments]

Hereinafter, an embodiment of the present invention

will be described.

[0035]

(Embodiment 1)

The image processor according to the first embodiment of the present invention is one in which conversion of low-resolution image into high-resolution image is carried out by performing interpolating by a simple configuration.

[0036]

That is, a pixel of original image that is closet to the position of new pixel for interpolation is taken as a pixel of interest, the difference between adjacent pixel data which is a pixel of original image are adjacent to each other putting between the pixel of interest is obtained, and the result of multiplication of the ratio between the distance between the pixel of interest and the new pixel and the distance between the adjacent pixels and the difference is added to the pixel data of the pixel of interest, thereby generating the pixel data of the new pixel.

[0037]

Figure 2 is a diagram illustrating the position of new pixel which is interpolated by the image processor according to the first embodiment of the present invention.

[0038]

In figure 2, numerals 201 through 209 are original pixels adjacent to each other in the horizontal or vertical direction

with a pixel interval of "1". Numeral 210 denotes a new pixel which is generated by interpolating low-resolution image, whose intensity is represented by F. Numeral 205 denotes a pixel of interest which is the closest to new pixel 210, which has intensity A. Numerals 202, 208, 204 and 206 denote upper pixel, lower pixel, left pixel, respectively, which are adjacent to the pixel of interest 205, and are situated at upper side, lower side, left-hand side, and right-hand side, respectively, with relative to the pixel of interest 205, and which are adjacent the pixel of interest 205 and have intensity B, C, D and E, respectively. Further, "i" denotes the distance between pixel of interest 205 and new pixel 210 in the horizontal direction, and "j" presents the distance between pixel of interest 205 and new pixel 210 in the vertical direction, and right hand direction and downward direction are assumed to be positive.

[0039]

The intensity F of new pixel 210 is calculated by the formula of

$$F=A+(i/2)(E-D)+(j/2)(C-B).$$

[0040]

Because the interpolation point is previously known in this formula,  $(i/2)$  and  $(j/2)$  can be provided as constants beforehand, and therefore, the number of times of operation required for calculating the intensity F requires twice of

multiplication and four times of addition or subtraction for calculating the intensity  $F$ . On the contrary, the conventional linear interpolation requires six times of multiplication and five times of addition or subtraction for calculating the intensity of new pixel, thereby the image processor according to the first embodiment of the present invention requires less calculation amount than the conventional linear interpolation.

[0041]

Next, intensity  $F$  of new pixel 210 will be briefly described with taking the horizontal direction of figure 2 as an example.

[0042]

Figure 5 is a diagram illustrating the intensity of new pixel which is interpolated by the image processor according to the first embodiment of the present invention.

[0043]

Here, a simple assumption is taken for interpolating. Hereinafter, the assumption will be described with referring to figure 5. Figure 5 is a diagram illustrating an image interpolation model. For simplification, the image is represented in one-dimension and broadening of an image is presented in the horizontal direction while intensity of image is presented in the vertical direction.

[0044]



In figure 5, the ordinate presents a intensity and the abscissas presents the distance in the horizontal direction in figure 2. Numerals 204, 205, 206, 210 and  $i$  denote the same elements as shown in figure 2. Numeral 501 denotes a intensity curved line (actually, intensity curved plane) of low-resolution image, 502 denotes a line presenting positions which are apart only by the distance " $i$ " from a pixel of interest 205, 503 denotes a line connecting an original pixel 204 and an original pixel 206, 504 denotes a line which is parallel with line 506 and connects a pixel of interest 205 and a new pixel 210, 505 denotes the pixel interval of low-resolution image, 506 denotes a line connecting a pixel of interest 205 and an original pixel 206, 507 denotes a crossing point of line 502 and line 506, which is a new pixel interpolated by the conventional linear interpolation. Further, numeral 509 denotes the distance between original pixel 204 and original pixel 206.

[0045]

In order to clarify the difference with the conventional linear interpolation, the intensity  $D$ ,  $A$  and  $E$  of original pixels 204, 205 and 206 are assumed to be  $D < E < A$ .

[0046]

When numeral 501 denotes an original intensity curved line of image, it is assumed that original image pixels are sampled at even intervals in the horizontal direction such as

204, 205 and 206. At this time, the interpolation data at the interpolated points on a straight line 502 are assumed to be obtained.

[0047]

As a reference, in a case where linear interpolation is performed, the crossing point of straight line 506 connecting pixel 205 and pixel 206 and straight line 502 becomes an interpolation data. In contrast thereto, the intersection point of a tangent of intensity curved line at the position of pixel 205 and straight line 502 is assumed to be an interpolation data in first embodiment of the present invention. Further, approximately, the gradient of a tangent at pixel 205 is assured to be equal to the gradient of straight line 503 connecting pixel 204 and pixel 206. According to this assumption, the straight line 504 having the same inclination as the straight line 503, and which passes through the pixel 205 can be obtained, and further, new pixel 210 as interpolated data can be obtained at the crossing point of the straight line 504 and the straight line 502.

[0048]

By assuming as above, the process is actually performed such that the intensity of the pixel 204 is subtracted from that of the pixel 206, the result is multiplied by a ratio between the distance "i" and the distance 509, and the result is added to the intensity of pixel 205, thereby it becomes

possible to obtain an interpolation result by quite an easy processing.

[0049]

In order to produce an actual formula, when the intensity of pixel 204 is assumed to be "D", the intensity of pixel 205 be "A", the intensity of pixel 206 be "E", the distance 509 be "2" (=twice as the interval of abutted pixels "1") and the distance 510 be "i", the intensity F of the pixel 210 is given by

$$F=A+(i/2)(E-D),$$

which is quite a simple formula requiring only one time multiplication and two times addition or subtraction.

[0050]

As shown in figure 5, while the intensity of new pixel 507 which is interpolated by the conventional linear interpolation amounts to the average of intensity A and E, the image processor according to the first embodiment can obtain high-quality image with sharpness since the intensity of new pixel 210 which is interpolated by the image processor is not limited to between the intensity A and F.

[0051]

Figure 11 is a block diagram showing the construction of the image processor according to the first embodiment.

In figure 11, numeral 1131 denotes a line memory means which is configured as follows.

[0052]

To be specific, numeral 1101 denotes a lower line memory which receives as its input low-resolution image sequentially from an original pixel data at upper end of frame, 1102 denotes a middle line memory which receives as its input the output of lower line memory 1101, 1103 denotes an upper line memory which receives as its input the output of middle line memory 1102, each line memory has a storage capacity for storing the original pixels of low-resolution image up to 1 line in the horizontal direction, and it outputs the oldest data of 1 pixel among stored data if one pixel data is input when the memory storage is filled. Further, 1105 denotes an upper end processing path for copying instantaneously the data which is stored in the middle line memory 1102 to the upper line memory 1103 at the frame upper end processing, and 1104 denotes a lower end processing path for instantaneously copying the data which is stored in the middle line memory 1102 to the lower line memory 1101 at the frame lower end processing.

[0053]

Further, numeral 1132 denotes a data buffer means that is configured as follows.

To be specific, numeral 1107 denotes a right pixel data buffer, 1108 denotes a pixel of interest data buffer, 1109 denotes a left pixel data buffer, 1110 denotes a lower right pixel data buffer, 1111 denotes a lower pixel data buffer, 1112

denotes an upper right pixel data buffer and 1113 denotes an upper pixel data buffer, each data buffer is a storage capacity for storing a data of 1 pixel temporarily, and output the data which is stored beforehand when the data of 1 pixel is input. Further, numeral 1106 denotes a left end processing path for copying instantaneously the data which is stored in the pixel of interest data buffer 1108 to the left pixel data buffer 1109 at a flame left end processing.

[0054]

Further, numeral 1130 denotes a pixel selection means that is constructed by a line memory means 1131 and a data buffer means 1132.

[0055]

Further, numeral 1133 denotes a new pixel data arithmetic means for obtaining the data of new pixel that is constructed as follows.

[0056]

To be specific, numeral 1114 denotes a horizontal subtracter for obtaining the difference in the horizontal direction, 1115 denotes a vertical subtracter for obtaining the difference in the vertical direction, 1116 denotes a horizontal arithmetic device for obtaining the correction value in the horizontal direction, 1117 denotes a vertical calculator for obtaining the correction value in the vertical direction, 1134 denotes a new pixel data calculator for

obtaining the data of new pixel.

[0057]

Hereinafter, the distance from pixel of interest to new pixel will be described by one dimension for simplification.

[0058]

Figure 3 is a diagram illustrating the position of new pixel in a case where 700 pieces of original pixels one line are interpolated by 1000 pieces of new pixels.

[0059]

In figure 3, numeral 301 denotes an axis representing horizontal direction of the flame, and  $p_0$ ,  $p_1$ ,  $p_2$  and  $p_3$  denote original pixels which represent the positions on the axis 301 by employing an arrow, respectively, and assumes the pixel interval be "1". The  $q_0$ ,  $q_1$ ,  $q_2$  and  $q_3$  denote new pixels which represent the positions on the axis 301 employing an arrow, respectively, each figure in parenthesis is pixel position which is represented by the distance from the original pixel  $p_0$ .

[0060]

Numeral 302 denotes the position of new pixel which is represented by a form dividing the distance from the original pixel  $p_0$  into an integral part and a decimal part, and the integral part presents the position of a pixel of interest against new pixel and the decimal part presents the distance from a pixel of interest to new pixel in such a manner that

the absolute value of decimal part does not exceed a threshold of 0.5. For instance, new pixel q3 has a distance from the original pixel p0 being 2.1, and dividing the same into integral part and decimal part not exceeding 0.5, results in 2+0.1, which means the pixel of interest against new pixel q3 is the original pixel p2, and the distance from the original pixel p2 to new pixel q3 is 0.1. Further, new pixel q1 has a distance from the original pixel p0 being 0.7, and dividing the same into integral part and decimal part not exceeding 0.5, results in 1-0.3, which means the pixel of interest against new pixel q1 is the original pixel p1 and the distance from the original pixel p1 to new pixel q1 is -0.3.

[0061]

Numeral 303 denotes the position of new pixel, which is presented by scaling the decimal part of the position 302 into 1/2. In the actual interpolation calculation, the distance "i" and "j" from pixel of interest to new pixel is scaled into 1/2 to be employed for the calculation, the decimal part is scaled into 1/2 beforehand, and the integral part and the decimal part are divided with the absolute value of the decimal part not exceeding threshold of 0.25. Further, the threshold value is obtained by multiplying 0.5 on the size of scaling.

[0062]

Hereinafter, the operation of line memory means 1131 and data buffer means 1132 will be described.

[0063]

Firstly, the basic operation will be described. This is a case where flame end processing (described later) is not related.

[0064]

When it has no relation to flame end processing, the line memory means 1131 and the data buffer means 1132 stores data of each full storage capacity.

[0065]

Here, the lower line memory 1101 receives as its input data of 1 pixel from the outside and output the oldest data of 1 pixel among stored data to the middle line memory 1102 and the lower right pixel data buffer 1110. Further, the middle line memory 1102 receives as its input the data of 1 pixel from the lower line memory 1101 and output the oldest data of 1 pixel among stored data to the upper line memory 1103 and the right pixel data buffer 1107. Further, the upper line memory 1103 receives as its input the data of 1 pixel from the middle line memory 1102 and output the oldest data of 1 pixel among stored data to the upper right pixel data buffer 1112.

[0066]

Further, the lower right pixel data buffer 1110 receives as its input the data of 1 pixel from the lower line memory 1101 and output the data of 1 pixel to the lower pixel data buffer 1111. Further, the lower pixel data buffer 1111



receives as its input the data of 1 pixel from the lower right pixel data buffer 1110 and output the data of 1 pixel to the vertical subtracter 1115.

[0067]

Further, the right pixel data buffer 1107 receives as its input the data of 1 pixel from the middle line memory 1102 and output the data of 1 pixel to the pixel of interest data buffer 1108 and the horizontal subtracter 1114. Further, the pixel of interest data buffer 1108 receives as its input the data of 1 pixel from the right pixel data buffer 1107 and output the data of 1 pixel to the left pixel data buffer 1109 and new pixel data calculator 1134. The left pixel data buffer 1109 receives as its input the data of 1 pixel from the pixel of interest data buffer 1108 and output the data of 1 pixel to the horizontal subtracter 1114.

[0068]

Further, the upper right pixel data buffer 1112 receives as its input the data of 1 pixel from the upper line memory 1103 and output the data of 1 pixel to the upper pixel data buffer 1113. The upper pixel data buffer 1113 receives as its input the data of 1 pixel from the upper right pixel data buffer 1112 and output the data of 1 pixel to the vertical subtracter 1115.

[0069]

Accordingly, if the data of pixel can be obtained by

scanning 1 line from left-hand side toward right-hand side of the image and each line sequentially from the upper side toward the lower side of the image, the highest line among three lines could be stored in the upper line memory 1103 in which a line data which is first input is stored among three line memories 1101, 1102 and 1103, the highest line among three lines is stored among three lines is stored. In addition, in the upper right pixel data buffer 1112 in which the pixel data which is first input is stored among two data buffer 1112 and 1113, the pixel data which is positioned at the left-side among two pixel data is stored.

[0070]

Accordingly, in the data buffer 1107 or 1113 in the data buffer means 1132 in figure 11, a right pixel, a pixel of interest, a left pixel, a right lower pixel, a lower pixel, an upper right pixel and an upper pixel are stored with locating the pixel of interest data buffer 1108 at their center. Thereby, the storing of pixel arrangement shown in figure 2 is realized.

[0071]

Hereinafter, four flame end processing will be described.

Firstly, the operation of flame upper end processing will be described.

[0072]

Since there is no pixel which is adjacent the pixel of interest at the upper side thereof in a case where a pixel of interest is a pixel of flame upper end, the flame upper end processing performs pixel interpolation with copying the data of pixel of interest thereto. Further, the flame upper end processing performs, when the lower line memory 1101 receives the vertical synchronous signal indicating the beginning of a flame, the following operation.

[0073]

When the data of pixel on the second line is input after storing all pixel data of the first one line, the lower line memory 1101 outputs stored pixel data of the first one to the middle line memory 1102 without outputting to the right pixel data buffer 1110. Then, the lower line memory 1101 stores all pixel data of the second line, and the middle line memory 1102 stores all pixel data of the first line.

[0074]

Then, the upper end processing path 1105 copies all pixel data of the second line which are stored in the middle line memory 1102 to the upper line memory 1103. The upper line memory 1103 stores all pixel data of the first line, and thereafter, the line memory means 1131 performs a basic operation.

[0075]

Secondly, a flame lower end processing will be described.

Since there is no pixel which is adjacent the pixel of interest at the lower side thereof in a case where the pixel of interest is a pixel of a flame lower end, the flame lower end processing performs pixel interpolation with copying the data of pixel of interest thereto. Further, the frame lower end processing performs, when the lower line memory 1101 receives a vertical synchronous signal indicating the end of flame.

[0076]

The lower line memory 1101 which receives as its input the data of pixel of the last line output stored data of pixel of the last line one by one pixel during the vertical synchronous signal. Thereafter, the data which is stored in the lower line memory 1101 is lost, and the middle line memory 1102 stores all pixel data of the last line.

[0077]

The lower end processing path 1104 copies the pixel data of the last line which is stored in the middle line memory 1102 to the lower line memory 1101. Then, the lower line memory 1101 stores the pixel data of the last line, and thereafter, the line memory means 1131 performs a basic operation.

[0078]

Thirdly, a flame left end processing will be described.

The flame left end processing performs, when the pixel of interest is a pixel of flame left end which has no pixel

adjacent the pixel of interest at left side thereof, pixel interpolation with copying the data of pixel of interest thereto. Further, the front left end processing performs, when the pixel of interest data buffer 1108 receives a horizontal synchronous signal indicating the beginning of the line, the following operation.

[0079]

The pixel of interest data buffer 1108 which received a horizontal synchronous signal indicating the beginning of the line stores the data of the first pixel. Next, the left end processing path 1106 copies the data of first pixel which is stored in the pixel of interest data buffer 1108 to the left pixel data buffer 1109. Then, the left pixel data buffer 1109 stores the first pixel data of each line, and thereafter, the data buffer means 1132 performs a basic operation.

[0080]

Fourthly, a flame right end processing will be described.

The flame right end processing performs, when the pixel of interest is a pixel of flame right end which has no pixel adjacent the pixel of interest at right side thereof, pixel interpolation with copying the data of pixel of interest thereto. Further, the flame end processing performs, when the lower line memory 1101 receives a horizontal synchronous signal indicating the end of the line, the following operation.

[0081]

Due to that the line memory means 1131 would not shift data during the horizontal synchronous signal indicating the end of the line, the data would not be shifted from the line memory means 1131 to the data buffer means 1132.

[0082]

Here, the right pixel data buffer 1107 copies the stored pixel data of the line end to the pixel of interest data buffer 1108, and the lower right pixel data buffer 1110 and the upper right pixel data buffer 1112 output stored pixel data of the line end to the lower pixel data buffer 1111 and the upper pixel data buffer 1113, respectively. Both the right pixel data buffer 1107 and the pixel of interest data buffer 1108 can store the data of the pixel of interest at the right end of the flame, and the left pixel data buffer 1109 can store the pixel data which is adjacent the pixel of interest at left side thereof, and the upper pixel data buffer 1113 and the lower pixel data buffer 1111 can store the pixel data which is adjacent the pixel of interest at the upper and the lower side thereof, respectively, and thereafter, the line memory means 1131 and the data buffer means 1132 performs basic operations.

[0083]

According to these four flame end processing, even when a pixel of interest is situated at the end part of flame which does not have an adjacent pixel at any side of the pixel of interest, the adjacent pixel value could be filled with the

value of pixel of interest, thereby resulting in capability of calculating new pixel data.

[0084]

In this way, the line memory means 1131 and the data buffer means 1132 can store the data of pixel of interest into the pixel of interest data buffer 1108 and store the data of pixels which are adjacent to the upper, the lower, the left side, and the right side of the target pixel into the upper pixel data buffer 1113, the lower pixel data buffer 1111, the left pixel data buffer 1109 and the right pixel data buffer 1107, respectively, by basic operations for shifting the data of pixel which is input from the outside one by one, and four frame end processing.

[0085]

Next, an operation of the arithmetic means 1133 will be described.

The horizontal subtracter 1114 receives as its input the right pixel data from the right pixel data buffer 1107 and the left pixel data from the left pixel data buffer 1109, and subtracts the left pixel data from the right pixel data, and output the difference in the horizontal direction to the horizontal arithmetic device 1116. The horizontal arithmetic device 1116 multiplies (coefficient  $1/2$ ), (the distance in horizontal direction from pixel of interest to new pixel) and (the difference in horizontal direction), and outputs the

horizontal correction value to new pixel data calculator 1134. The vertical subtracter 1115 receives as its inputs the lower pixel data from the lower pixel data buffer 1111 and the upper pixel data from the upper pixel data buffer 1113, and subtracts the upper pixel data from the lower pixel data, and output the difference in vertical direction to the vertical arithmetic device 1117. The vertical arithmetic device 1117 multiplies (coefficient  $1/2$ ), (the distance in vertical direction from pixel of interest to new pixel) and (the difference in vertical direction), and outputs the vertical correction value to new pixel data calculator 1134. The new pixel data calculator 1134 receives as its input the data of pixel of interest from the pixel of interest data buffer 1108, and adds (the data of pixel of interest), (horizontal correction value) and (vertical correction value), and output the new pixel data.

[0086]

Next, an operation procedure of the operation means 1133 will be described with referring to figure 1.

Figure 1 is a flow chart showing an operation procedure for performing resolution conversion of an image of  $S \times T$  pixels to that of  $X \times Y$  pixels.

[0087]

In figure 1,  $S$  denotes a pixel number of low-resolution image in the horizontal direction,  $T$  denotes a pixel number of low-resolution image in the vertical direction,  $X$  denotes



a pixel number of high-resolution image in the horizontal direction,  $Y$  denotes a pixel number of high-resolution image in the vertical direction,  $px$  denotes a horizontal pitch,  $py$  denotes a vertical pitch,  $yy$  denotes a position of pixel of interest in the vertical direction,  $b$  denotes a vertical coefficient,  $l$  denotes a vertical loop counter,  $xx$  denotes a position of pixel of interest in the horizontal direction,  $a$  denotes a horizontal coefficient,  $k$  denotes a horizontal loop counter,  $Q[k,l]$  denotes a intensity at the position of new pixel  $[k,l]$ ,  $P[xx,yy]$  denotes a intensity at the position of original pixel  $[xx,yy]$ , and there are relations of  $0 < S \leq X$ ,  $0 < T \leq Y$ ,  $0 \leq k < X$ ,  $0 \leq l < Y$ ,  $0 \leq xx < S$ , and  $0 \leq yy < T$ .

[0088]

S101 denotes a pitch-calculating step for calculating the pitch of new pixel in each of the horizontal and vertical directions. The horizontal pitch  $px$  is calculated by  $S/X/2$ , and the vertical pitch  $py$  is calculated by  $T/Y/2$ .

[0089]

S102 denotes a vertical loop default setting up step for setting initial values for variables concerning the vertical loop, and it assigns the initial value "0" to the position  $yy$  in vertical direction of the pixel of interest, the vertical coefficient  $b$ , and the vertical loop counter  $l$ , respectively.

[0090]

S103 denotes a horizontal loop default setting up step

for setting initial values for variables concerning the horizontal loop, and it assigns the initial value "0" to the position xx in horizontal direction of pixel of interest, the horizontal coefficient a, and the horizontal loop counter k, respectively.

[0091]

S104 denotes a intensity calculating step for calculating the intensity of new pixel and the intensity of new pixel Q [k,l] is calculated by

$$Q[k,l] = P[xx,yy] + a(P[xx+1,yy] - P[xx-1,yy]) \\ + b(P[xx,yy+1] - P[xx,yy-1]).$$

[0092]

S105 denotes a horizontal coefficient calculating step for calculating new horizontal coefficient, and it is calculated by adding the horizontal pitch px to the horizontal coefficient a.

[0093]

S106 denotes a horizontal coefficient threshold comparison step for comparing the horizontal coefficient with threshold value 0.25, and, in accordance with the comparison result, it proceeds to step S108 when the horizontal coefficient a is smaller than or equal to the threshold value, while it proceeds to step S107 when it is larger than the threshold value.

[0094]

S107 denotes a pixel of interest right shifting step for shifting the pixel of interest toward right direction, and the position of pixel of interest in the horizontal direction is shifted by  $xx=xx+1$ , and the horizontal coefficient is shifted by  $a=a-0.5$ .

[0095]

S108 denotes a horizontal loop conclusion judging step for judging the conclusion of horizontal loop which is repeated from step S104 through S108, and it compares new horizontal loop counter  $k$  which is obtained by adding 1 to the pixel number  $x$  in horizontal direction of high-resolution image, and, in accordance with the comparison result, it proceeds to step S104 when new horizontal loop counter  $k$  is smaller than  $x$ , while it proceeds to step S109 when it is equal to  $x$ .

[0096]

S109 denotes a vertical coefficient-calculating step for calculating new vertical coefficient, and it is calculated by adding the vertical pitch  $py$  to the vertical coefficient  $b$ .

[0097]

S110 denotes a vertical coefficient threshold comparison step for comparing the vertical coefficient with threshold value 0.25, and, in accordance with the comparison result, it proceeds to step S112 when the vertical coefficient  $b$  is smaller than or equal to the threshold value, while it proceeds to step S111 when it is larger than the threshold value.

[0098]

S111 denotes a pixel of interest downward shifting step for shifting the pixel of interest in downward direction, and the position of pixel of interest in the vertical direction is shifted by  $yy=yy+1$ , and the vertical coefficient is shifted by  $b=b-0.5$ .

[0099]

S112 denotes a vertical loop conclusion judging step for judging the conclusion of vertical loop which is repeated from step S103 through S112, and it compares new vertical loop counter  $l$ , which is obtained by adding "1" to the vertical loop counter  $l$ , with the pixel number  $Y$  in vertical direction of high-resolution image, and, in accordance with the comparison result, it proceeds to step S103 when new vertical loop counter  $l$  is smaller than  $Y$ , while it terminates pixel interpolation of an image when it is equal to  $Y$ .

[0100]

In the image processor according to the first embodiment of the invention, the image processor for converting low-resolution image to high-resolution image with interpolating the low-resolution image includes a pixel selection means 1130 for extracting a pixel of interest, an upper pixel, a lower pixel, a left pixel and a right pixel, the vertical subtracter 1115 for calculating the difference in vertical direction on the basis of the upper and lower pixel data, the horizontal

subtractor 1114 for calculating the difference in horizontal direction on the basis of the left and right pixel data, the vertical arithmetic device 1117 for calculating the vertical correction value on the basis of the difference in vertical direction and the distance from a pixel of interest to new pixel in vertical direction, the horizontal arithmetic device 1116 for calculating the horizontal correction value on the basis of the difference in horizontal direction, and the distance from a pixel of interest to new pixel in vertical direction, and the new pixel data calculator 1134 for calculating the new pixel data on the basis of data of pixel of interest, the vertical correction value, and the horizontal correction value, and further, the intensity  $F$  is calculated by  $F=A+(i/2)(E-D)+(j/2)(C-B)$  on the basis of intensity  $A$  of pixel of interest, the intensity  $B$  of upper pixel, the intensity  $C$  of lower pixel, the intensity  $D$  of left pixel, the intensity  $E$  of right pixel and the position  $(i, j)$  of new pixel. Thereby, it is possible to reduce an operation amount for interpolating images and to improve the processing speed, and further, a high-quality image with sharpness is obtained without smoothing an edge part of image.

[0101]

(Embodiment 2)

The image processor according to a second embodiment is one which converts a low-resolution image of horizontal 320

x vertical 240 pixels to a high-resolution image of horizontal 640 Xvertical 480 pixels with interpolating to twice number of pixels in each of the horizontal and vertical directions, and one which is limited to interpolation to twice number in vertical and horizontal directions which are well employed in resolution conversion processing so as to suppress arithmetic operation amount to the minimum.

[0102]

Figure 12 is a block diagram showing the construction of the image processor according to the second embodiment.

In figure 12, like reference characters as figure 11 designate the same parts, 1233 denotes new pixel data arithmetic means and is constructed as follows.

[0103]

To be specific, 1114 and 1115 denotes the same elements as those in figure 11, 1216 denotes a horizontal arithmetic device for obtaining the horizontal correction value by shifting the difference in the horizontal direction leftward by 3 bit so as to make the same to  $1/8$ , 1217 denotes a vertical arithmetic device for obtaining the vertical correction value by shifting the difference in the vertical direction by 3 bit so as to make to  $1/8$ , 1218 denotes an upper left new pixel data calculator for calculating the data of new pixel for interpolation at upper left of pixel of interest, 1219 denotes an upper right new pixel data calculator for calculating the

data of new pixel for interpolation at upper right of pixel of interest, 1220 denotes a lower left new pixel data calculator for calculating the data of new pixel for interpolation at lower left of pixel of interest, 1221 denotes a lower right new pixel data calculator for calculating the data of new pixel for interpolation at lower right of pixel of interest. Further, 1235 denotes new pixel data calculator which is constructed by the upper left new pixel data calculator 1218, the upper right new pixel data calculator 1219, the lower left new pixel data calculator 1220, and the lower right new pixel data calculator 1221.

[0104]

Further, 1234 is a maintenance means, and is constructed as follows.

1222 denotes an upper new pixel line memory for storing the data of new pixel which is situated at the upper of pixel of interest by 1 line of high-resolution image, 1223 denotes a lower new pixel line memory for storing the data of new pixel which is situated at the lower of pixel of interest by 1 line of high-resolution image.

[0105]

Figure 7 is a diagram illustrating the position of new pixel which is interpolated by the image processor according to the embodiment of the present invention.

[0106]

In figure 7, "○" denotes an original pixel of low-resolution image having a pixel interval of "1", "□" denotes a new pixel of high-resolution image. Further, new pixels do not match with the position of original pixel, but are positioned at points which are distant from the original pixels by the distances the absolute values of which are  $1/4$  in both the horizontal and vertical directions. The intensity of the original pixels of 701, 702, 703, 704 and 705 and the new pixels of 706, 707, 708, 709 are designated as P701, P702, P703, P704, P705, Q706, Q707, Q708 and Q709, respectively.

[0107]

According to this pixel arrangement, since all the new pixels are arranged at equal intervals from the original pixels, the appearance probability of the error of pixel data becomes uniform. However, in this arrangement, the operation amount will increase because it is necessary to create all of new pixels. In this second embodiment, utilizing the nature that the distances from the original pixel are all equal, the calculation amount can be suppressed.

[0108]

To be specific, if  $difx = (1/8)(P705 - P704)$ ,  $difx = (1/8)(P703 - P702)$  are first calculated on the basis of original pixels 701, 702, 703, 704 and 705, the arithmetic expression for calculating the intensity of new pixels Q706, Q707, Q708, Q709, becomes as follows,



$$Q706 = P701 - \text{difx} - \text{dify}$$

$$Q707 = P701 + \text{difx} - \text{dify}$$

$$Q708 = P701 - \text{difx} + \text{dify}$$

$$Q709 = P701 + \text{difx} + \text{dify}$$

and, number of times required for obtaining the intensity Q706 through Q709 of four new pixels from the intensity P701 of one pixel of interest are only ten times addition or subtraction and two times division.

[0109]

In addition, if the calculation of  $P701 - \text{difx}$  and  $P701 + \text{difx}$  are shared, the intensity of four new pixels can be obtained by eight times addition and subtraction and two times division.

[0110]

Next, the operation will be described.

The horizontal subtracter 1114 receives as its inputs the data of right pixel from the right pixel data buffer 1107 and the data of left pixel from the left pixel data buffer 1109, and subtracts the data of left pixel from the data of right pixel, and output the difference in the horizontal direction to the horizontal arithmetic device 1216. The horizontal arithmetic device 1216 shifts the difference in the horizontal direction toward leftward to  $1/8$  and outputs the horizontal correction value to the upper left new pixel data calculator 1218, the upper right new pixel data calculator 1219,

the lower left new pixel data calculator 1220, and the upper right new pixel data calculator 1221. Further, the vertical subtracter 1115 receives as its inputs the data of lower pixel from the lower pixel data buffer 1111 and input the data of upper pixel from the upper pixel data buffer 1113, and subtracts the data of upper pixel from the data of lower pixel, and output the difference in the vertical direction to the vertical arithmetic device 1217. The vertical arithmetic device 1217 shifts the difference in the vertical direction toward leftward to  $1/8$  and outputs the vertical correction value to the upper left new pixel data calculator 1218, the upper right new pixel data calculator 1219, the lower left new pixel data calculator 1220 and the upper right new pixel data calculator 1221.

[0111]

The upper left new pixel data calculator 1218 receives as its input the vertical correction value from the vertical arithmetic device 1217, the horizontal correction value from the horizontal arithmetic device 1216, and the data of pixel of interest from the pixel of interest data buffer 1108, respectively, and then subtracts the vertical correction value and the horizontal correction value from the data of pixel of interest and output the data of new pixel to be interpolated to the upper new pixel line memory 1222. The upper right new pixel data calculator 1219 subtracts the vertical correction

value from the data of pixel of interest and adds the horizontal correction value, and output the data of new pixel to be interpolated to the upper new pixel line memory 1222. The lower left new pixel data calculator 1220 adds the vertical correction value to the data of pixel of interest and subtracts the horizontal correction value, and output the data of new pixel to be interpolated to the lower new pixel line memory 1223. The lower right new pixel data calculator 1221 adds the vertical correction value to the data of pixel of interest and adds the horizontal correction value, and output the data of new pixel to be interpolated to the lower next pixel line memory 1223.

[0112]

The upper new pixel line memory 1222 receives as its input the data from the upper left new pixel data calculator 1218 and subsequently the data from the upper right new pixel data calculator 1219 by 1 pixel alternately, and stores the data of new pixel to be interpolated at upper of pixel of interest for 1 line of the high-resolution image, and output all of 1 line in the order of storing. The lower new pixel line memory 1223 receives as its input the data from the lower left new pixel data calculator 1220 and subsequently the data from the lower right new pixel data calculator 1221 by 1 pixel alternately, and stores the data of new pixel to be interpolated at the lower of pixel of interest for 1 line of high-resolution

image, and output all of 1 line in the order of storing, after the upper new pixel line memory 1222 output the data of 1 line.

[0113]

Next, a calculation procedure of the arithmetic means 1233 will be described with referring to figure 8.

Figure 8 is a flow chart showing a calculation procedure for performing resolution conversion from horizontal 3200× vertical 240 pixels to horizontal 640 × vertical 480 pixels with interpolating to twice number of pixels in both of the horizontal and vertical directions in the image processor according to the second embodiment of the present invention.

[0114]

In figure 8, difx is horizontal correction value, dify is vertical correction value, and k, l, Q, P are the same as those in figure 1, and there are relations of  $0 \leq k < 320$ ,  $0 \leq l < 240$ .

[0115]

S801 denotes a vertical loop default initial setting up step for setting an initial value to a variable related to a vertical loop, which assigns initial value 0 to the vertical loop counter l.

[0116]

S802 denotes a horizontal loop default initial setting up step for setting an initial value to a variable related to a horizontal loop, which assigns initial value 0 to the horizontal loop counter k.

[0117]

S803 denotes a correction value calculating step for calculating a correction value in both the horizontal and vertical direction, which obtains the horizontal correction value  $difx$  and the vertical correction value  $dify$  by calculating  $difx = (P[k+1,1] - P[k-1,1])/8$ ,  $dify = (P[k,1+1] - P[k,1-1])/8$ , respectively.

[0118]

S804 denotes a intensity calculating step for calculating the intensity of four new pixels, and the intensity of new pixel for interpolation to the upper left of pixel of interest  $Q[2k,2l]$ , the intensity of new pixel for interpolation to the upper right of pixel of interest  $Q[2k+1,2l]$ , the intensity of new pixel for interpolation to the lower left of pixel of interest  $Q[2k,2l+1]$ , and the intensity of new pixel for interpolation at lower right of pixel of interest  $Q[2k+1,2l+1]$  by calculating  $Q[2k,2l] = P[k,l] - difx - dify$ ,  
 $Q[2k+1,2l] = P[k,l] + difx - dify$ ,  
 $Q[2k,2l+1] = P[k,l] - difx + dify$ ,  $Q[2k+1,2l+1] = P[k,l] + difx + dify$  respectively.

[0119]

S805 denotes a horizontal loop conclusion judging step for judging the conclusion of horizontal loop which comprises repeating step S803 through S805, which compares new horizontal loop counter  $k$  which is obtained by adding 1 to the

horizontal loop counter  $k$  with the number of pixels 320 in the horizontal direction of low-resolution image, and according to the result, it proceeds to step S 803 in when new horizontal loop counter  $k$  is smaller than 320 while it proceeds to step S806 when it is equal to 320.

[0120]

S806 denotes a vertical loop conclusion judging step for judging the conclusion of vertical loop which comprises repeating step S802 through S806, which compares new vertical loop counter  $l$  which is obtained by adding 1 to the vertical loop counter  $l$  with the number of pixels 240 in the vertical direction of low-resolution image, and according to the result, it proceeds to step S 802 when new vertical loop counter  $l$  is smaller than 240 while it terminates pixel interpolation of an image when where it is equal to 240.

[0121]

The new pixel data  $Q[2k, 2l]$ ,  $Q[2k+1, 2l]$ ,  $Q[2k, 2l+1]$  and  $Q[2k+1, 2l+1]$  which are obtained by the above-described operation will be transferred to the upper new pixel line memory 1222 in the order of  $Q[2k, 2l]$ ,  $Q[2k+1, 2l]$ , and transferred to the lower new pixel line memory 1223 in the order of  $Q[2k, 2l+1]$ ,  $Q[2k+1, 2l+1]$ .

[0122]

In the image processor according to the second embodiment of the present invention, the image processor for converting

low-resolution image to high-resolution image having twice number of pixels in both the vertical and horizontal directions includes a pixel selection means 1130 for extracting a pixel of interest, an upper pixel, a lower pixel, a left pixel, and a right pixel, the vertical subtracter 1115 for calculating the difference in the vertical direction based upon the data of upper and lower pixel, the horizontal subtracter 1114 for calculating the difference in the horizontal direction based upon the data of left and right pixel, the vertical arithmetic device 1117 for calculating the vertical correction value based upon the difference in the vertical direction and the distance from a pixel of interest to new pixel in the vertical direction, the horizontal arithmetic device 1116 for calculating the horizontal correction value based upon the difference in the horizontal direction and the distance from a pixel of interest to new pixel in the horizontal direction, and the new pixel data calculator 1235 for calculating the data of new pixel which are positioned at upper left, upper right, lower left, and lower right of pixel of interest based upon the data of pixel of interest, the vertical correction value, and the horizontal correction value, and the maintenance means 1234 for holding the data of new pixel which is calculated by the new pixel data calculator 1235 temporarily, and outputting the data sequentially from the upper left new pixel of high-resolution image, and the position of new pixel is made

such that the absolute values of the distances from pixel of interest are  $V/4$  in both the horizontal and vertical directions. This can improve the processing speed by reducing the operation amount with maintaining the appearance probability of the error of the pixel data as well as provide images with sharpness without smoothing edge parts of the image.

[0123]

(Embodiment 3)

The image processor according to a third embodiment is one which converts a low-resolution image of horizontal 320  $\times$  vertical 240 pixel to a high-resolution image of horizontal 320  $\times$  vertical 480 pixel with interpolating to twice number of pixels in the vertical direction, which is used for image processing for generating a frame screen by interpolating a field screen of an interlace signal such as NTSC signal which is used for current TV broadcasting.

[0124]

Figure 13 is a block diagram showing a construction of the image processor according to the third embodiment.

In figure 13, the same reference numerals denotes the same elements as in figure 11 or figure 12, 1333 denotes a new pixel data arithmetic means, constructed as follows.

[0125]

To be specific numerals 1115 and 1217 denotes the same elements in figure 11 or figure 12, 1318 denotes the upper new



pixel data calculator for calculating the data of new pixel for interpolation at upper of pixel of interest, 1320 denotes the lower new pixel data calculator for calculating the data of new pixel for interpolation to the lower of pixel of interest, 1335 denotes a new pixel data calculator which is constituted by the upper new pixel data calculator 1318 and the lower new pixel data calculator 1320.

[0126]

Further, in the pixel selection means 1330 the image processor according to the third embodiment has a configuration having omitted the left pixel data buffer 1109 and the left end processing path 1106 in the pixel selection means 1130 in figure 12.

[0127]

Figure 9 is a diagram illustrating the position of new pixel which is interpolated by the image processor according to the third embodiment.

[0128]

In figure 9, "○" denotes an original pixel of low-resolution image having a pixel interval being "1", "□" denotes a new pixel of high-resolution image. Further, a new pixel matches the position of original pixel, and is positioned at a point which is distant from the original pixel in the vertical direction by  $1/4$ . Have in the absolute value, the intensity of original pixels of 901, 902, 903 and new pixels

of 904 and 905 are designated as P901, P902, P903, Q904 and Q905.

[0129]

According to this pixel arrangement, all the new pixels are arranged at equal intervals from the original pixels so as to make uniform the appearance probability of error of pixel data.

[0130]

Though a large calculation amount is required because it is necessary to create all new pixels in the arrangement, by employing a similar devise as in the second embodiment of the present invention, the operation amount can be suppressed.

[0131]

To be specific ,if  $dify = (1/8)(P903 - P902)$  is first calculated on the basis of original pixels 901, 902, 903 the arithmetic expression for calculating the intensity of new pixels Q904, Q905 becomes as follows,

$$Q904 = P901 - difx$$

$$Q905 = P901 + difx$$

and, a number of times required for calculating the intensity Q904 and Q905 of two new pixels from the intensity P901 of pixel of interest are three times addition or subtraction and one division.

[0132]

Hereinafter, an operation of new pixel data arithmetic

means 1333 will be described.

The vertical subtracter 1115 receives as its input the lower pixel data from the lower pixel data buffer 1111, and the upper pixel data from the upper pixel data buffer 1113, and subtracts the upper pixel data from the lower pixel data, and output the difference in the vertical direction to the vertical arithmetic device 1217. The vertical arithmetic device 1217 shifts the difference in the vertical direction leftward by 3 bits to  $1/8$  and output the vertical correction value to the upper new pixel data calculator 1318 and the lower new pixel data calculator 1320.

[0133]

The upper new pixel data calculator 1318 receives as its inputs the vertical correction value from the vertical arithmetic device 1217, and the data of pixel of interest from the pixel of interest data buffer 1108, and subtracts the vertical correction value from the data of pixel of interest and output the data of new pixel for interpolation at the upper of pixel of interest. The lower new pixel data calculator 1320 adds the vertical correction value to the data of pixel of interest and output the data of new pixel to be interpolated at the lower of pixel of interest to the lower new pixel line memory 1223.

[0134]

The upper new pixel line memory 1222 stores the data of

new pixel to be interpolated at the upper of pixel of interest by 1 line of the high-resolution image, and output all the 1 line in the order of storing. The lower new pixel line memory 1223 stores the data of new pixel to be interpolated at the lower of pixel of interest by 1 line of high-resolution image, and output all the 1 line in the order of storing, after the upper new pixel line memory 1222 output the data of 1 line.

[0135]

Hereinafter, an operation procedure of the new pixel data arithmetic means 1333 will be described.

[0136]

Figure 10 is a flow chart showing an operation procedure for performing resolution conversion of horizontal 3200× vertical 240 pixels to horizontal 320 × vertical 480 pixels with interpolating to twice number of pixels in the vertical direction in the image processor according to the third embodiment of the present invention.

[0137]

In figure 10,  $k$ ,  $l$ ,  $Q$ ,  $P$  denotes the same elements as those in figure 1 or figure 8, and there are relations of  $0 \leq k < 320$ ,  $0 \leq l < 240$ .

[0138]

S1001 denotes a vertical loop default setting up step for setting the initial value to a variable related to the vertical loop, which assigns the initial value 0 to the vertical

loop counter l.

[0139]

S1002 denotes horizontal loop default setting up step for setting the initial value to a variable related to the horizontal loop, which assigns the initial value 0 to the horizontal loop counter k.

[0140]

S1003 denotes a correction value calculating step for obtaining the correction value in the vertical direction, the vertical correction value dify is calculated by  $dify = (P[k, l+1] - P[k, l-1]) / 8$ .

[0141]

S1004 denotes a intensity calculating step for obtaining the intensity of two new pixels, which calculates the intensity  $Q[k, 2l]$  of new pixel to be interpolated at the upper of pixel of interest and the intensity  $Q[k, 2l+1]$  of new pixel to be interpolated at the lower side of pixel of interest by  $Q[k, 2l] = P[k, l] - dify$  and  $Q[k, 2l+1] = P[k, l] + dify$  respectively.

[0142]

S1005 denotes a horizontal loop conclusion judging step for judging the conclusion of horizontal loop repeating step S1003 through S1005, and it compares new horizontal loop counter k obtained by adding 1 to the horizontal loop counter k with the number of pixels 320 in the horizontal direction of low-resolution image, and according to the result, it

proceeds to step S1003 when where new horizontal loop counter  $k$  is smaller than 320 while it proceeds to step S1006 when it is equal to 320.

[0143]

S1006 denotes a vertical loop conclusion judging step for judging the end of vertical loop repeating step S1002 through S1006, and it compares new vertical loop counter  $l$  obtained by adding 1 to the vertical loop counter  $l$  with the number of pixels 240 in the vertical direction of low-resolution image, and according to the result, it proceeds to step S1002 when new vertical loop counter  $l$  is smaller than 240 while it terminates a pixel interpolation of an image when it is equal to 240.

[0144]

New pixel data  $Q[k, 2l]$  and  $Q[k, 2l+1]$  are calculated by the above-mentioned operation procedure, and  $Q[k, 2l]$  is transferred to the upper new pixel line memory 1222 and  $Q[k, 2l+1]$  is transferred to the lower new pixel line memory 1222.

[0145]

Accordingly, in the image processor according to the third embodiment of the present invention, the image processor for converting low-resolution image to high-resolution image having twice number of pixels in the vertical direction includes a pixel selection means 1330 for extracting a pixel

of interest, an upper pixel, and a lower pixel, the vertical subtracter 1115 for obtaining the difference in the vertical direction on the basis of the data of upper and lower pixel, the vertical arithmetic device 1217 for calculating the vertical correction value on the basis of the difference in the vertical direction and the distance from a pixel of interest to new pixel in the vertical direction, the new pixel data calculator 1335 for calculating the data of new pixel which are positioned at the upper and the lower of pixel of interest on the basis of the data of pixel of interest and the vertical correction value, and the maintenance means 1234 for holding the data of new pixel which is calculated by the new pixel data calculator 1335 temporarily and outputting the data sequentially from the upper left new pixel of high-resolution image, and the position of new pixel is made such that the absolute value of the distance from pixel of interest in the vertical direction is  $1/4$ , thereby improving processing speed with making uniform the appearance ratio of error of pixel data and further reducing the amount of calculation, as well as obtaining an high-quality image with sharpness without edge parts of the image being smoothed.

[0146]

Though in the above first to third embodiments a pixel data is assumed to be only intensity data, the pixel data may be color data or color difference data of RGB, GMYK, and the

like ,with the same effect described above are obtained.

[0147]

Further, in the first to third embodiments an image processor and an image processing method as an operation flowchart are described, these can be realized by a computer program which is recorded in a recording medium such as ROM, and operates similarly as the image processing method in the first to third embodiments with the same effects obtained.

[0148]

[Effect of the Invention]

As described above, the image processing apparatus according to Claim 1 of the present invention provides an image processor which converts a low-resolution image to a high-resolution image that includes a pixel selection means for selecting a pixel of interest which is located at a position closest to a pixel for interpolation to be newly generated between pixels (hereinafter, simply referred to as "new pixel") and adjacent pixels adjacent the pixel of interest from the pixels of the low-resolution image, respectively, and new pixel data calculation means for calculating the difference between the adjacent pixels putting between the pixel of interest, obtaining the amending value on the basis of the difference and the distance between the pixel of interest and the new pixel, and calculating the data value of the new pixel on the basis of the data of the pixel of interest, the difference,



and the amending value. Therefore, it is possible to carry out the interpolation of image with a small operation amount as well as obtain image with sharpness.

[0149]

Further, the image processing method according to Claim 2 of the present invention provides an image processing method which converts a low-resolution image to a high-resolution image that includes a pixel selection step for selecting a pixel of interest which is located at a position closest to a pixel for interpolation to be newly generated between pixels (hereinafter, simply referred to as "new pixel") and adjacent pixels adjacent the pixel of interest, respectively, from the pixels of the low-resolution image, and new pixel data calculation step for obtaining the difference between the adjacent pixels putting between the pixel of interest, obtaining the amending value on the basis of the difference and the distance between the pixel of interest and the new pixel, and calculating the data value of the new pixel on the basis of the data of the pixel of interest, the difference, and the amending value. Therefore, it is possible to carry out the interpolation of image with a small operation amount as well as obtain an image with sharpness.

[0150]

Further, the image processing program recording medium according to Claim 3 of the present invention has stored an

image processing program performing conversion of a low-resolution image into a high-resolution image therein, which program includes a pixel selection step for selecting a pixel of interest which is located at a position closest to a pixel for interpolation to be newly generated between pixels (hereinafter, simply referred to as "new pixel") and adjacent pixels adjacent the pixel of interest, from the pixels of the low-resolution image, respectively, and new pixel data calculation step for obtaining the difference between the adjacent pixels putting between the particular pixel, obtaining the amending value on the basis of the difference and the distance between the pixel of interest and the new pixel, and calculating the data value of the new pixel on the basis of the data of the pixel of interest, the difference, and the amending value. Therefore, it is possible to carry out an interpolation of image with a small operation amount as well as obtain an image with sharpness.

[0151]

Further, the image processor according to Claim 4 of the present invention provides an image processor according to Claim 1 in which the pixel selection means is one which selects data A of the pixel of interest of the low-resolution image, located at a position closest to a pixel for interpolation to be newly created (hereinafter, referred to as "new pixel") between pixels of the low-resolution image having distances

of "1" between adjacent pixels, data B of upper pixel of the low-resolution image adjacent the pixel of interest at upper side thereof, data C of lower pixel of the low-resolution image adjacent the picture of interest at lower side thereof, data D of left pixel of the low-resolution image adjacent the pixel of interest at left side thereof, and data E of right pixel of the low-resolution image adjacent the pixel of interest at right side thereof, and the new pixel data calculation means is one which calculates data F of new pixel composing the high-resolution image by a formula of  $F = A + (i/2) (E - D) + (j/2) (C - B)$  on the basis of data A of pixel of interest, data B of upper pixel, data C of lower pixel, data D of left pixel, data E of right pixel, the position of the new pixel (i, j) which are represented by a distance "i" in the horizontal direction and a distance "j" in the vertical direction from the pixel of interest to the new pixel. Therefore, it is possible to carry out the interpolation of image with a small operation amount in the horizontal and vertical directions as well as obtain image with sharpness.

[0152]

Further, the image processing method according to Claim 5 of the present invention provides an image processing method according to Claim 2 in which the pixel selection process is one which selects data A of the pixel of interest of the low-resolution image, located at a position closest to a pixel

for interpolation to be newly created (hereinafter, referred to as "new pixel") between pixels of the low-resolution image having distances of "1" between adjacent pixels, data B of upper pixel of the low-resolution image adjacent the pixel of interest at upper side thereof, data C of lower pixel of the low-resolution image adjacent the pixel of interest at lower side thereof, data D of left pixel of the low-resolution image adjacent the pixel of interest at left side thereof, and data E of right pixel of the low-resolution image adjacent the pixel of interest at right side thereof, and the new pixel data calculation process is one which calculates data F of new pixel composing the high-resolution image by a formula of  $F = A + (i/2)(E - D) + (j/2)(C - B)$  on the basis of data A of pixel of interest, data B of upper pixel, data C of lower pixel, data D of left pixel, data E of right pixel, the position of the new pixel (i, j) which is represented by a distance "i" in the horizontal direction and a distance "j" in the vertical direction from the pixel of interest to the new pixel. Therefore, it is possible to carry out the interpolation of image with a small operation amount in the horizontal and vertical directions as well as obtain an image with sharpness.

[0153]

Further, the image processing recording medium according to Claim 6 provides an image processing recording medium according to Claim 3 in which the pixel selection process is

one which selects data A of the pixel of interest of the low-resolution image, located at a position closest to a pixel for interpolation to be newly created (hereinafter, referred to as "new pixel") between pixels of the low-resolution image having distances of "1" between adjacent pixels, data B of upper pixel of the low-resolution image adjacent the pixel of interest at upper side thereof, data C of lower pixel of the low-resolution image adjacent the pixel of interest at lower side thereof, data D of left pixel of the low-resolution image adjacent the pixel of interest at left side thereof, and data E of right pixel of the low-resolution image adjacent the pixel of interest at right side thereof, and the new pixel data calculation process is one which calculates data F of new pixel composing the high-resolution image by a formula of  $F = A + (i/2)(E - D) + (j/2)(C - B)$  on the basis of data A of pixel of interest, data B of upper pixel, data C of lower pixel, data D of left pixel, data E of right pixel, the position of the new pixel (i, j) which is represented by a distance "i" in the horizontal direction and a distance "j" in the vertical direction from the pixel of interest to the new pixel. Therefore, it is possible to carry out an interpolation of image with a small operation amount in the horizontal and vertical directions as well as obtain an image with sharpness.

[0154]

Further, the image processor according to Claim 7 of the

present invention provides an image processor according to Claim 4 in which when generating the high-resolution image having twice number of pixels in each of the horizontal and vertical direction for the low-resolution image, the position of new pixel is set by making the absolute value of the distance "i" in the horizontal direction and that of the distance "j" in the vertical direction from the pixel of interest be  $1/4$ , respectively, and the new pixel data calculating means is one which, when calculating data F1, F2, F3 and F4 of the new pixel located at upper left, upper right, lower left, lower right of the pixel of interest, respectively, by  $F=A+(i/2)(E-D)+(j/2)(C-B)$ , previously calculates  $X=(i/2)(E-D)$  and  $Y=(j/2)(C-B)$  and then calculates  $F1=A-X-Y$ ,  $F2=A+X-Y$ ,  $F3=A-X+Y$ , and  $F4=A+X+Y$ . Therefore, it is possible to provide an image processor in which, when interpolating the image to twice number in the horizontal direction and the vertical direction, can make the appearance probability of error of pixel data uniform and further realize the interpolation with a small operation amount and obtain the image with sharpness.

[0155]

Further, the image processing method according to Claim 8 provides an image processing method according to Claim 5 in which when generating the high-resolution image having twice number of pixels in both the horizontal and vertical direction for the low-resolution image, the position of new pixel is set

by making the absolute values of the distance "i" in the horizontal direction and the distance "j" in the vertical direction from the pixel of interest be  $1/4$ , respectively, and the new pixel data calculating process is one which, when calculating data F1, F2, F3 and F4 of the new pixel located at upper left, upper right, lower left, lower right of the pixel of interest, respectively, by  $F=A+(i/2)(E-D)+(j/2)(C-B)$ , previously calculates  $X=(i/2)(E-D)$  and  $Y=(j/2)(C-B)$  and then calculates  $F1=A-X-Y$ ,  $F2=A+X-Y$ ,  $F3=A-X+Y$ , and  $F4=A+X+Y$ . Therefore, it is possible to provide an image processing method which can, when interpolating the image to twice number both in the horizontal direction and the vertical direction, make uniform the appearance probability of error of pixel data, and further, can realize the interpolation with a small operation amount and can obtain the image with sharpness.

[0156]

Further, the image processing program recording medium according to Claim 9 of the present invention provides an image processing recording medium according to Claim 6, in which when generating the high-resolution image having twice number of pixels in both the horizontal and vertical direction for the low-resolution image, the position of new pixel is made by setting the absolute values of the distance "i" in the horizontal direction and the distance "j" in the vertical direction from the pixel of interest be  $1/4$ , respectively, and

the new pixel data calculating process is one which, when calculating data  $F_1$ ,  $F_2$ ,  $F_3$  and  $F_4$  of the new pixel located at upper left, upper right, lower left, lower right of the pixel of interest, respectively, by  $F=A+(i/2)(E-D)+(j/2)(C-B)$ , previously calculates  $X=(i/2)(E-D)$  and  $Y=(j/2)(C-B)$  and then calculates  $F_1=A-X-Y$ ,  $F_2=A+X-Y$ ,  $F_3=A-X+Y$ , and  $F_4=A+X+Y$ . Therefore, it is possible to provide an image processing program recording medium which has recorded a program therein which program, when interpolating the image twice number in the horizontal direction and the vertical direction, can make uniform the appearance probability of error of pixel data, and further, can realize the interpolation with a small operation amount and can obtain the image with sharpness.

[0157]

Further, the image processor according to Claim 10 provides an image processor according to Claim 1 in which the pixel selection means is one which selects data A of pixel of interest located at a position closest to a pixel for interpolation to be newly generated (hereinafter, simply referred to as "new pixel") between pixels of low-resolution image having a distance between adjacent pixels being "1", data B of upper pixel of low-resolution image adjacent at upper side of the pixel of interest, data C of lower pixel of low-resolution image adjacent at lower side of the pixel of interest, and the new pixel data calculation means is one which calculates



data F of the new pixel by a formula of  $F=A+(j/2)(C-B)$  on the basis of the data A of pixel of interest, data B of upper pixel, data C of lower pixel and the distance "j" in the vertical direction from the pixel of interest to the new pixel. Therefore, it is possible to provide an image processor which can interpolate an image in the vertical direction with less operation amount and which can obtain a high-quality image with sharpness.

[0158]

Further, the image processing method according to Claim 11 of the present invention provides an image processing method according to Claim 2 in which the pixel selection process is one which selects data A of pixel of interest located at a position closest to a pixel for interpolation to be newly generated (hereinafter, simply referred to as "new pixel") between pixels of low-resolution image having a distance between adjacent pixels being "1", data B of upper pixel of low-resolution image adjacent at upper side of the pixel of interest, data C of lower pixel of low-resolution image adjacent at lower side of the pixel of interest, and the new pixel data calculation process is one which calculates data F of the new pixel by a formula of  $F=A+(j/2)(C-B)$  on the basis of the data A of pixel of interest, data B of upper pixel, data C of lower pixel, and the distance "j" in the vertical direction from the pixel of interest to the new pixel. Therefore, it

is possible to obtain an image processing method which can interpolate an image in the vertical direction with a less operation amount and which can obtain a high-quality image with sharpness.

[0159]

Further, the image processing program recording medium according to Claim 12 of the present invention provides an image processing program recording medium according to Claim 3 in which the pixel selection process is one which selects data A of pixel of interest located at a position closest to a pixel for interpolation to be newly generated (hereinafter, simply referred to as "new pixel") between pixels of low-resolution image having a distance between adjacent pixels being "1", data B of upper pixel of low-resolution image adjacent at upper side of the pixel of interest, data C of lower pixel of low-resolution image adjacent at lower side of the pixel of interest, and the new pixel data calculation process is one which calculates data F of the new pixel by a formula of  $F=A+(j/2)(C-B)$  on the basis of the data A of pixel of interest, data B of upper pixel, data C of lower pixel and the distance "j" in the vertical direction from the pixel of interest to the new pixel. Therefore, it is possible to obtain an image processing program recording medium which has recorded a program therein, which program can interpolate an image in the vertical direction with a less operation amount and which can

obtain a high-quality image with sharpness.

[0160]

Further, the image processor according to Claim 13 of the present invention provides an image processor according to Claim 10 in which when generating the high-resolution image having twice number of pixels in the vertical direction for the low-resolution image, the position of new pixel is made by setting the absolute value of the distance "j" in the vertical direction from the pixel of interest be  $1/4$ , and the new pixel data calculation means is one which, when calculating data F5 and F6 of new pixel which are adjacent at upper and lower of the pixel of interest, respectively, by a formula of  $F=A+(j/2)(C-B)$ , calculates  $Y=(j/2)(C-B)$  previously, and then calculates  $F5=A-X$  and  $F6=A+Y$ . Therefore, it is possible to provide an image processor which can, in interpolating an image to twice in the vertical direction, make uniform appearance probability of error of pixel data, perform interpolation with a less operation amount and obtain a high-quality image with sharpness.

[0161]

Further, the image processing method according to Claim 14 of the present invention provides an image processing method according to Claim 11 in which, when generating high-resolution image having twice number of pixels in the vertical direction for said low-resolution image, the position of new

pixel is made have the absolute value of a distance "j" in the vertical direction from the pixel of interest being 1/4, and the new pixel data calculation process is one which, when calculating the data F5 and F6 of the new pixel located at upper and lower of the pixel of interest, respectively, by a formula of  $F=A+(j/2)(C-B)$ , previously calculates  $Y=(j/2)(C-B)$ , and then calculates  $F5=A-X$  and  $F6=A+Y$ . Therefore, it is possible to provide an image processing method which, in interpolating an image to twice in the vertical direction, can make uniform appearance probability of error of pixel data, and can perform interpolation with a less operation amount and obtain a high-quality image with sharpness.

[0162]

The image processing program recording medium according to Claim 15 of the present invention provides an image processing program according to Claim 12 in which, when generating the high-resolution image having twice number of pixels in the vertical direction for the low-resolution image, the position of the new pixel is made have the absolute value of a distance "j" in the vertical direction from the pixel of interest be 1/4, and the new pixel data calculation process is one which, when calculating data F5 and F6 of the new pixel located at upper and lower of the pixel of interest, respectively, by a formula of  $F=A+(j/2)(C-B)$ , previously calculates  $Y=(j/2)(C-B)$  and then calculates

$F5=A-X$  and  $F6=A+Y$ . Therefore, it is possible to provide an image processing program recording medium which, in interpolating an image to twice in the vertical direction, can make uniform appearance probability of error of pixel data, and can perform interpolation with a less operation amount and obtain a high-quality image with sharpness.

[Brief description of the Drawings]

[Figure 1]

Figure 1 is a flow chart showing an operation procedure of a calculation procedure of performing resolution conversion of  $S \times T$  pixel image to  $X \times Y$  pixel image in the image processor according to the first embodiment of the present invention.

[Figure 2]

Figure 2 is a diagram illustrating the position of new pixel which is interpolated by the image processor according to the first embodiment of the present invention.

[Figure 3]

Figure 3 is a diagram showing the position of new pixel in a case where 700 pieces of original pixels in 1 line are interpolated by 1000 new pixels.

[Figure 4]

Figure 4 is a diagram illustrating the interpolation position of pixels according to the conventional linear interpolation.

[Figure 5]

Figure 5 is a diagram illustrating the intensity of new pixel which is interpolated by the image processor according to the first embodiment of the present invention.

[Figure 6]

Figure 6 is a diagram illustrating the pixel arrangement when the conventional image processing method performs resolution conversion to twice number of pixels in the horizontal and vertical directions, respectively.

[Figure 7]

Figure 7 is a diagram illustrating the position of new pixel interpolated by the image processor according to the second embodiment of the present invention.

[Figure 8]

Figure 8 is a flow chart showing a calculation procedure for performing resolution conversion from an image of horizontal 320 × vertical 240 pixels to horizontal 640 × vertical 480 pixels with interpolating to twice number of pixels in the horizontal and vertical directions, respectively, in the image processor according to the second embodiment of the present invention.

[Figure 9]

Figure 9 is a diagram illustrating the position of new pixel which is interpolated by the image processor according to the third embodiment of the present invention.

[Figure 10]

Figure 10 is a flow chart showing an operation procedure for performing resolution conversion from horizontal 320 x vertical 240 pixels to horizontal 320 x vertical 480 pixels with interpolating to twice number of pixels in the vertical direction in the image processor according to the third embodiment of the present invention.

[Figure 11]

Figure 11 is a block diagram showing the construction of the image processor according to the first embodiment of the present invention.

[Figure 12]

Figure 12 is a block diagram showing the construction of the image processor according to the second embodiment of the present invention.

[Figure 13]

Figure 13 is a block diagram showing the construction of the image processor according to the third embodiment of the present invention.

[Figure 14]

Figure 14 is a diagram showing an example of a situation where the image processor as a target of the present invention is employed.

[Description of the Reference Numerals]

202...original pixel having intensity B

204...original pixel having intensity D

205...pixel of interest having intensity A  
206...original pixel having intensity E  
208...original pixel having intensity C  
210...new pixel having intensity F  
i...distance in the horizontal direction  
j...distance in the vertical direction  
301...axis  
302...position of new pixel which is represented by a form  
divided into an integral part and a decimal part  
303...position of new pixel which is represented by scaling  
the decimal part 302 into  $1/2$   
401...original pixel having intensity G  
402...original pixel having intensity H  
403...original pixel having intensity I  
404...original pixel having intensity J  
405...new pixel having intensity K  
m...distance in the vertical direction  
n...distance in the horizontal direction  
501...intensity curved line of low-resolution image  
502...line presenting positions which are apart only by the  
distance j from a pixel of interest 205  
503...line connecting an original pixel 204 and an original  
pixel 206  
504...line connecting a pixel of interest 205 and a new pixel  
210



505...pixel interval of low-resolution image  
506...line connecting a pixel of interest 205 and an original pixel 206  
507...new pixel created by the conventional linear interpolation  
601-603...original pixel  
604-610...new pixel  
701-705...original pixel  
706-709...new pixel  
901-903...original pixel  
904,905...new pixel  
1101...lower line memory  
1102...middle line memory  
1103...upper line memory  
1104...lower end processing path  
1105...upper end processing path  
1106...left end processing path  
1107...right pixel data buffer  
1108...pixel of interest data buffer  
1109...left pixel data buffer  
1110...lower right pixel data buffer  
1111...lower pixel data buffer  
1112...upper right pixel data buffer  
1113...upper pixel data buffer  
1114...horizontal subtractor

1115...vertical subtracter  
1116...horizontal arithmetic device  
1117...vertical arithmetic device  
1130...pixel selection means  
1131...line memory means  
1132...data buffer means  
1133,1233,1333...new pixel data arithmetic means  
1134...new pixel data calculator  
1216...horizontal arithmetic device  
1217...vertical arithmetic device  
1218...upper left new pixel data calculator  
1219...upper right new pixel data calculator  
1220...lower left new pixel data calculator  
1221...lower right new pixel data calculator  
1222...upper new pixel line memory  
1223...lower new pixel line memory  
1234...maintenance means  
1235,1335...new pixel data calculator  
1318...upper new pixel data calculator  
1320...lower new pixel data calculator

[Name of the Document] Abstract

[Summary]

[Object] It is an object to provide an image processor, a image processing method and an image processing program-recording medium, which can reduce the operation amount to improve processing speed, and further, obtain an high-quality image with sharpness, in performing conversion low-resolution image to high-resolution image.


[Construction] Intensity  $F$  of new pixel is calculated by a formula of  $F=A+(i/2)(E-D)+(j/2)(C-B)$  on the basis of intensity  $A$  of a pixel of interest 205, intensity  $B$  of an original pixel 202 adjacent at upper side of a pixel of interest 205, intensity  $C$  of an original pixel 208 adjacent at lower side of a pixel of interest 205, intensity  $D$  of an original pixel 204 adjacent at left side of a pixel of interest 205, and intensity  $E$  of an original pixel 206 adjacent at the right side of a pixel of interest 205.

[Selected Figure] Figure 2


Name of Document

【書類名】 図面 Drawing


【図1】 Figure 1

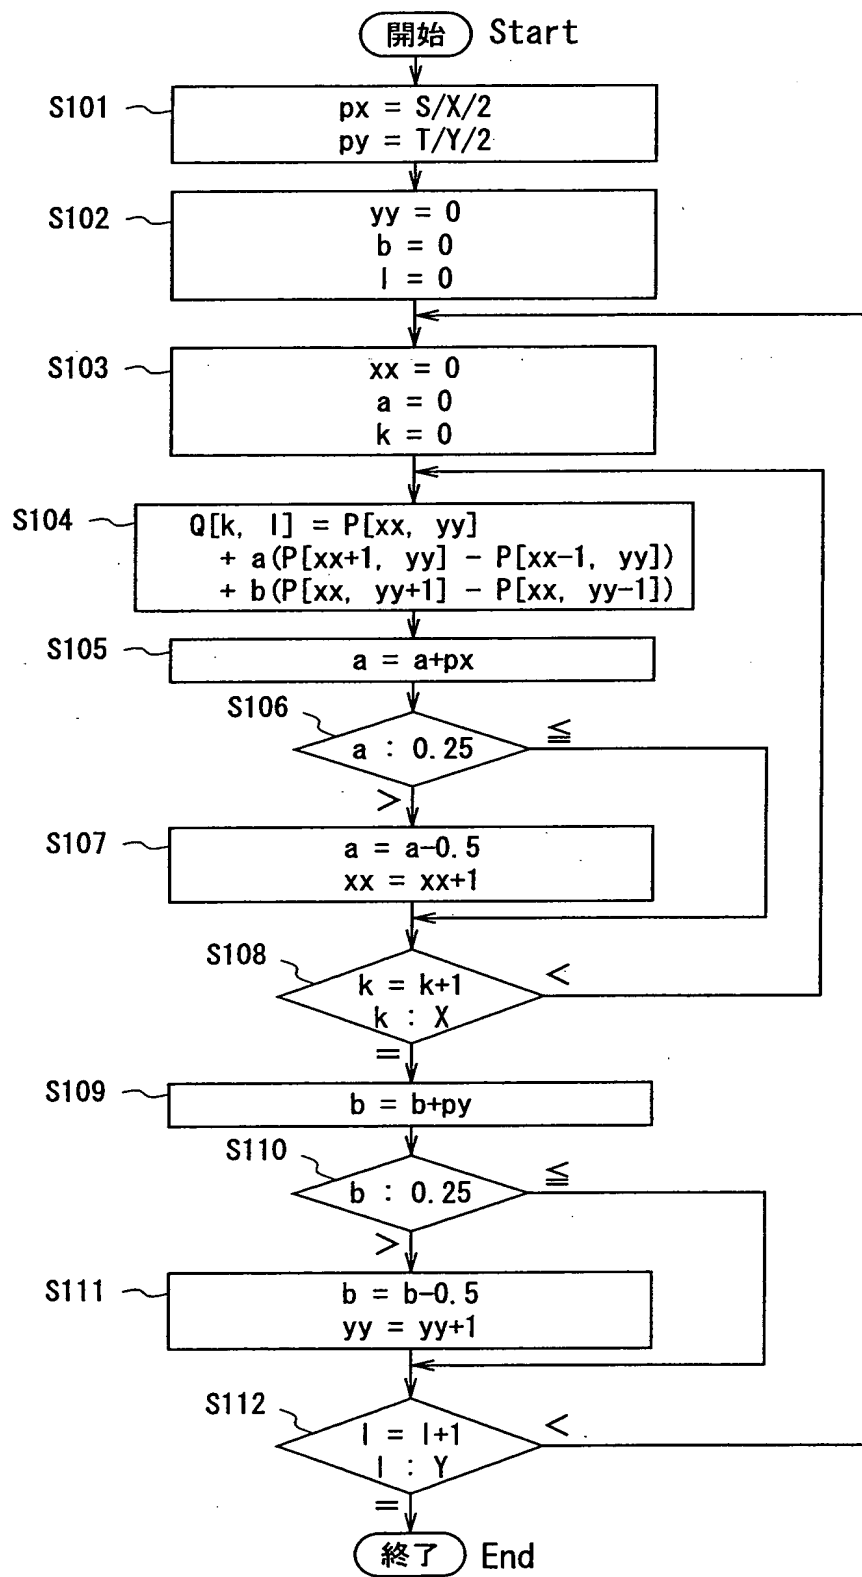


【図2】 Figure 2

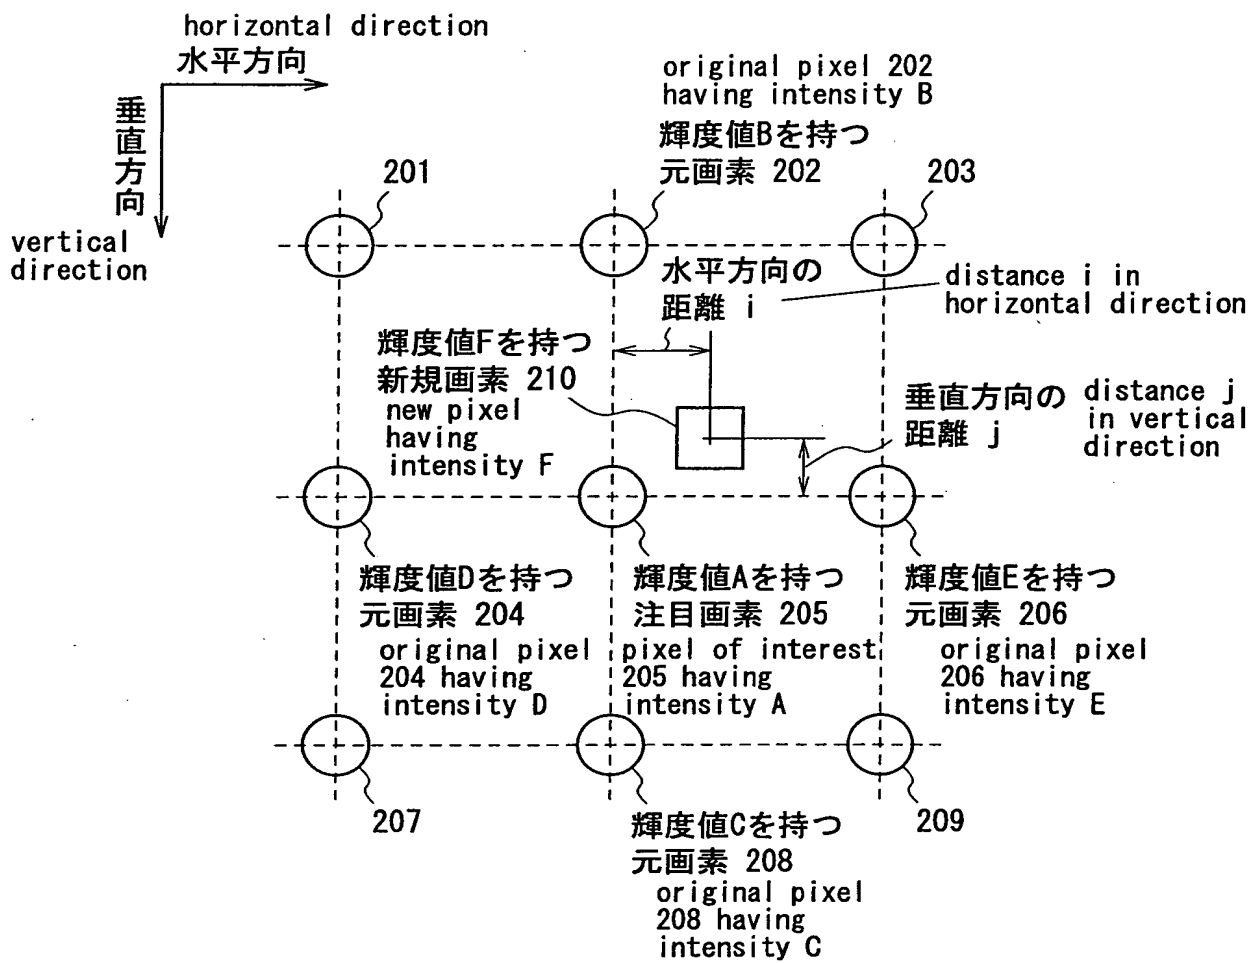


【図3】 Figure 3

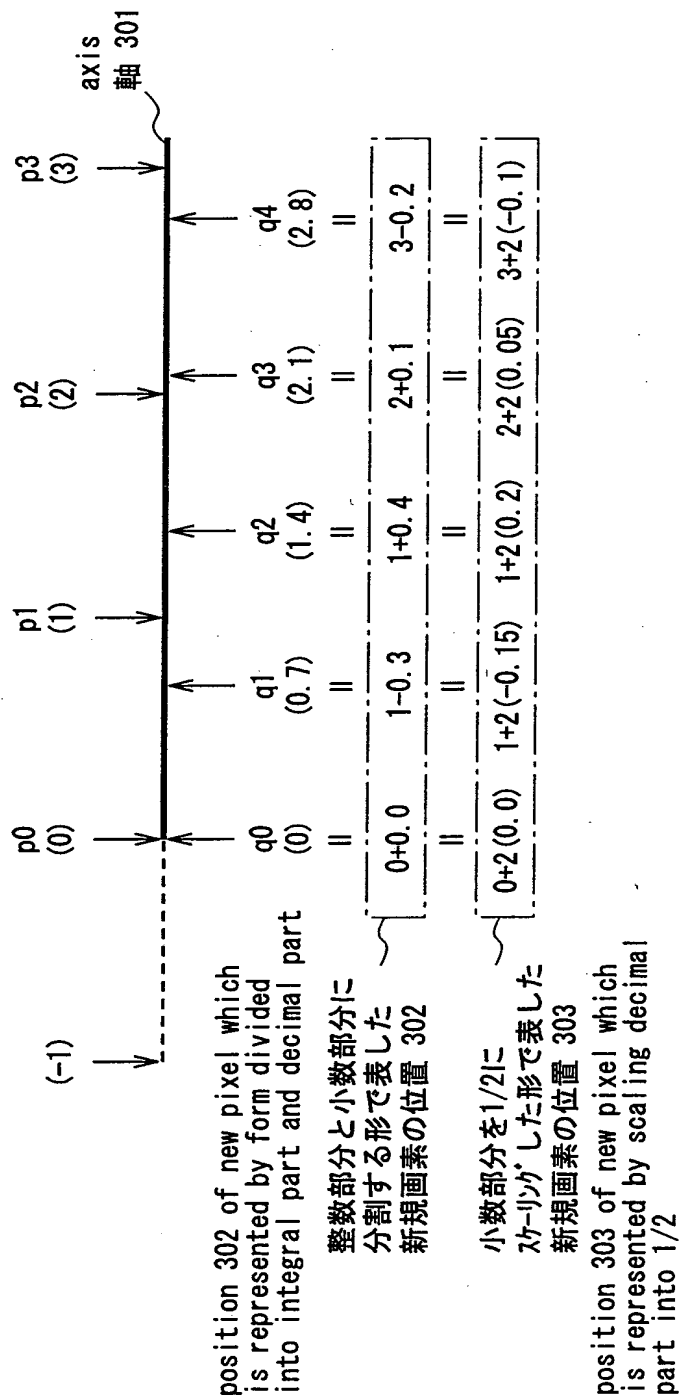

【図4】 Figure 4

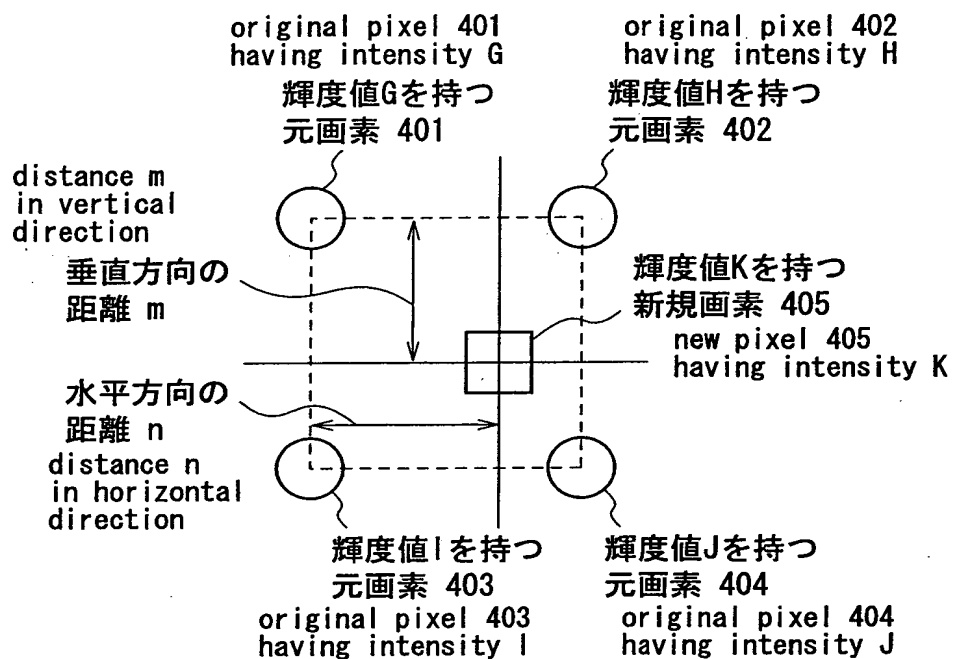


【図5】 Figure 5

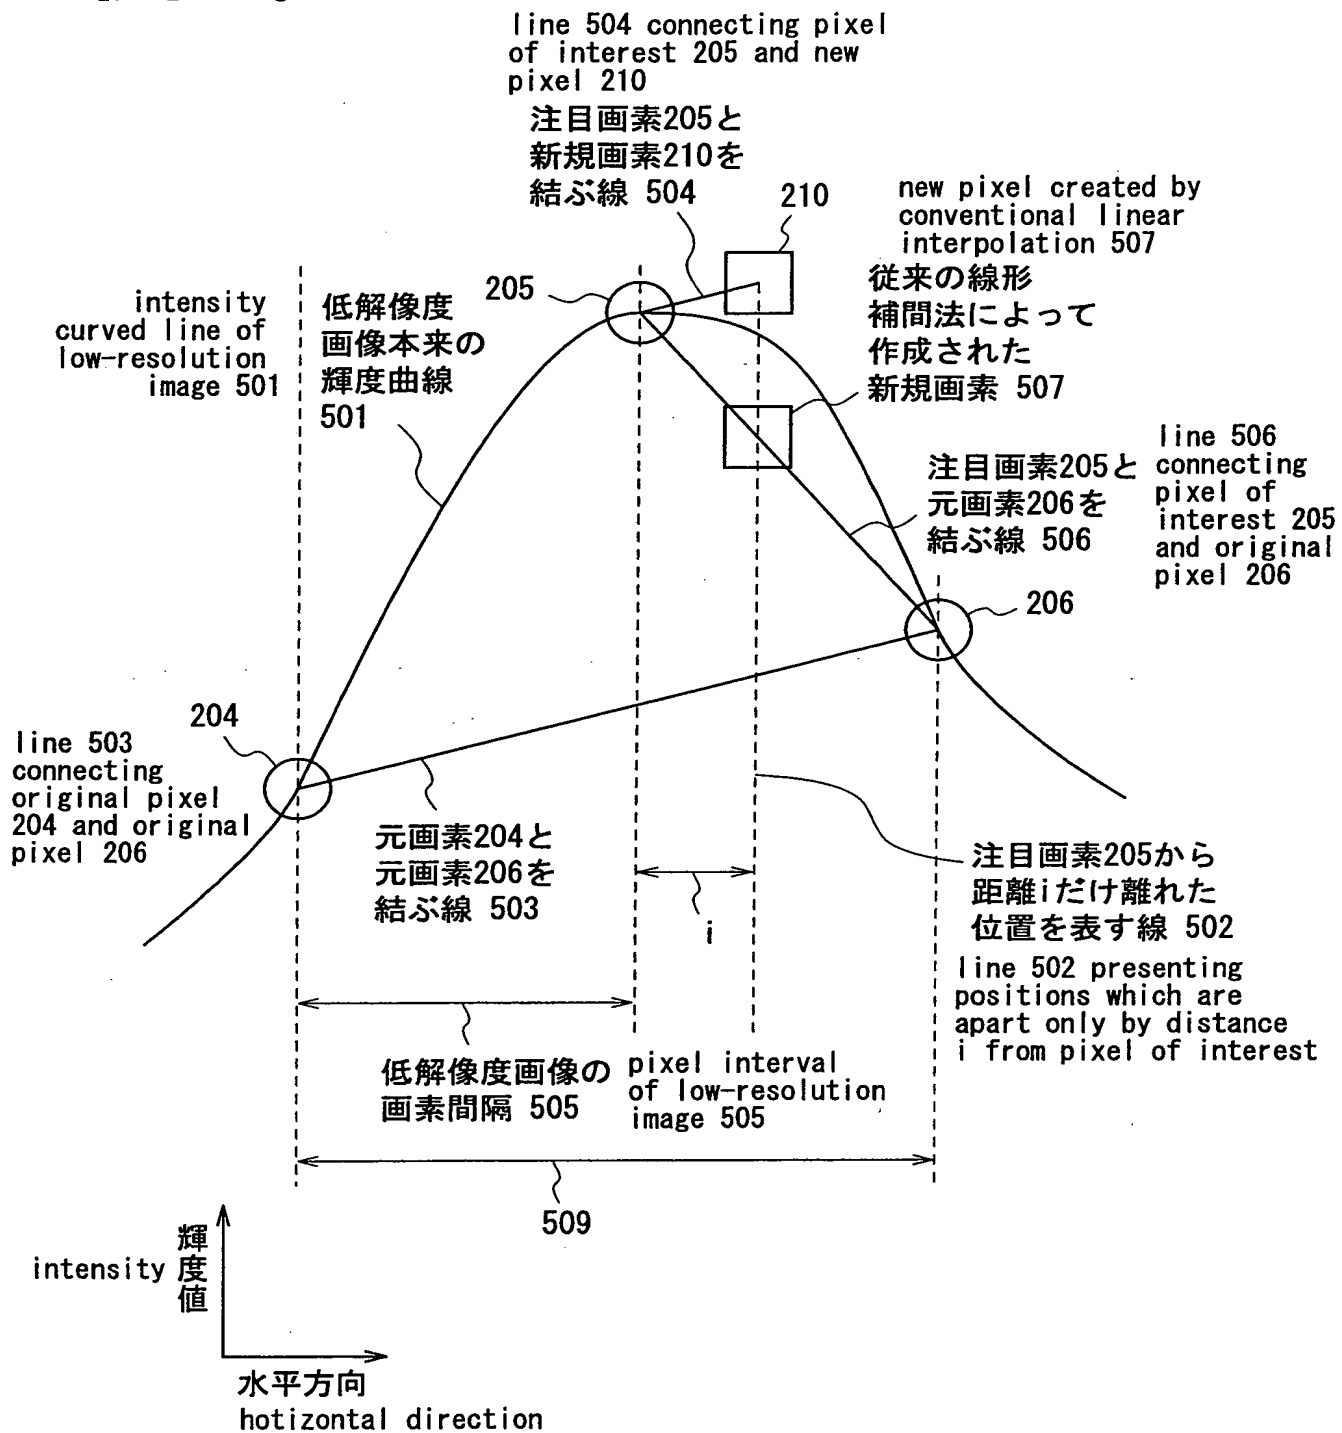





【図6】 Figure 6

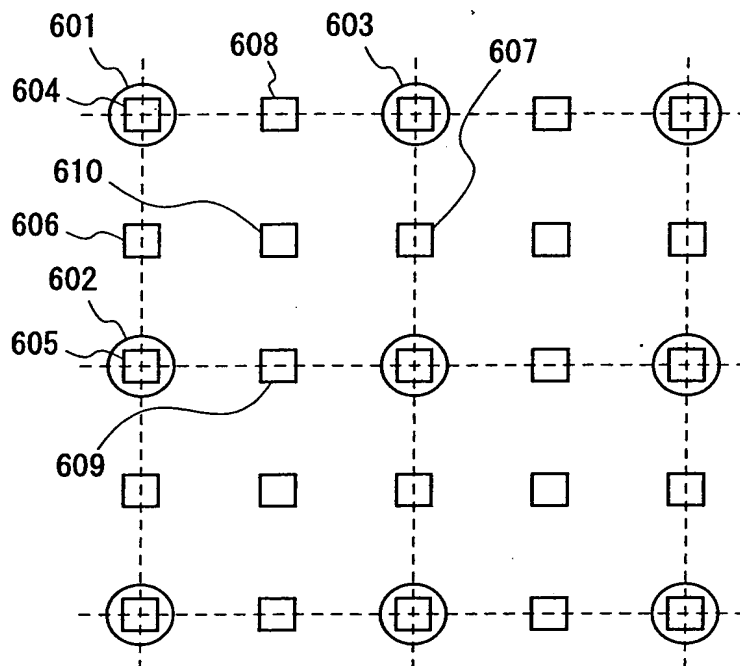


【図7】 Figure 7

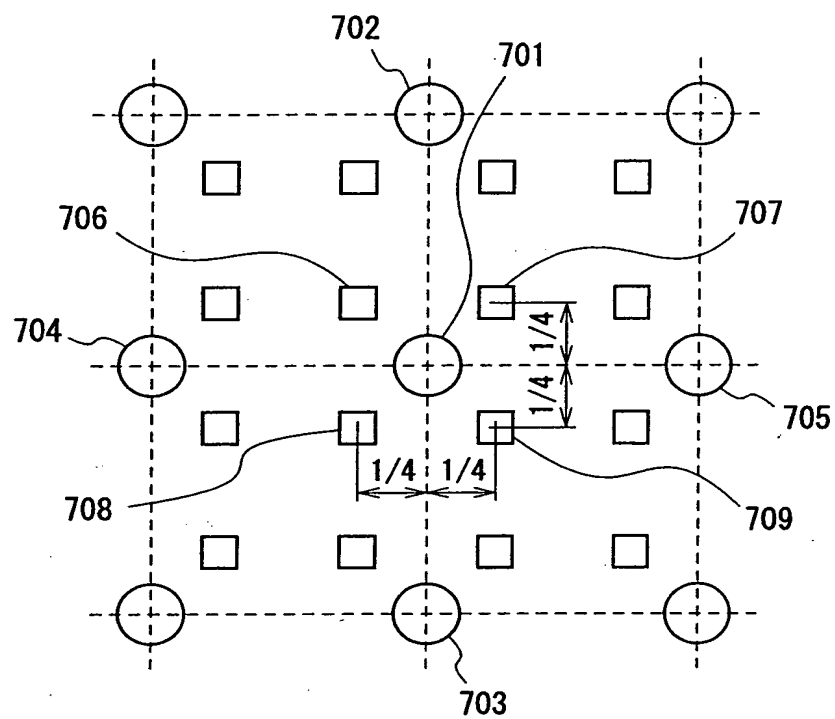


【図8】 Figure 8

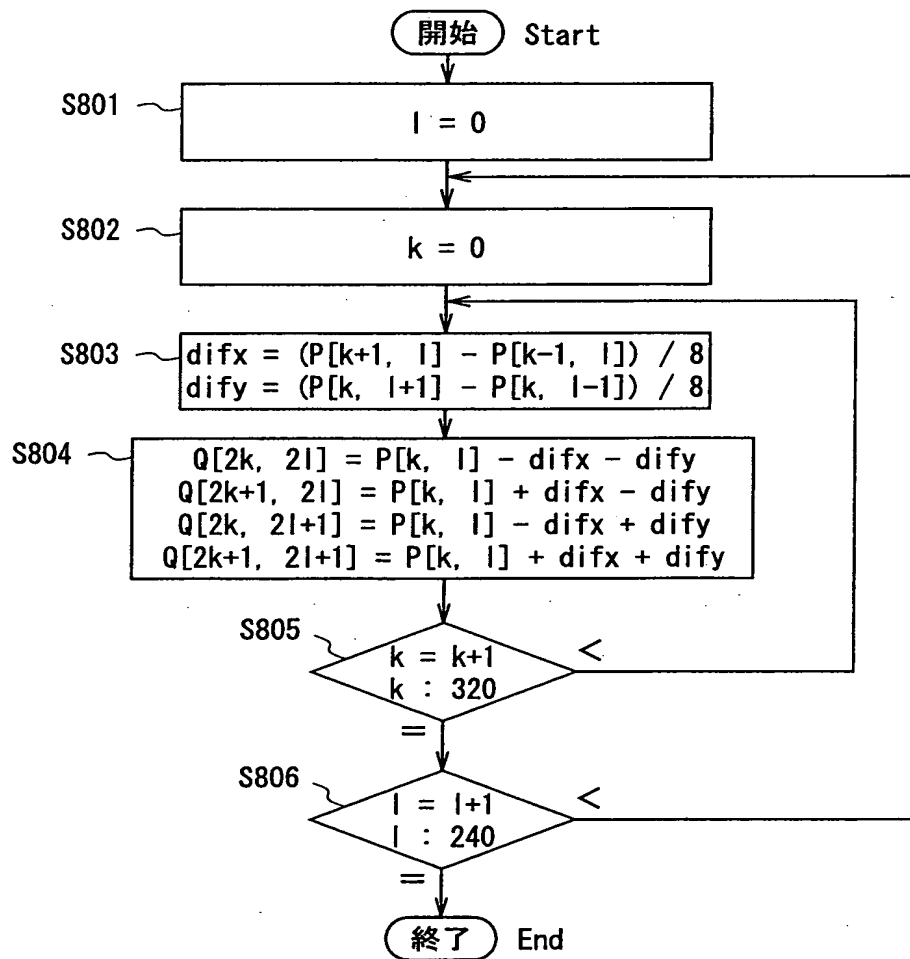


【图9】 Figure 9

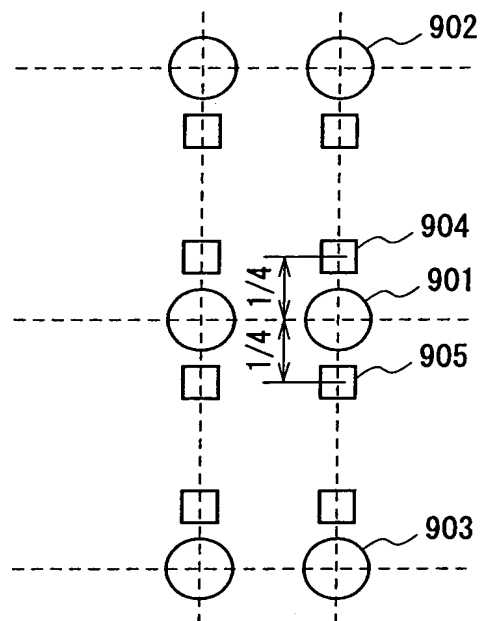


【図10】 Figure 10

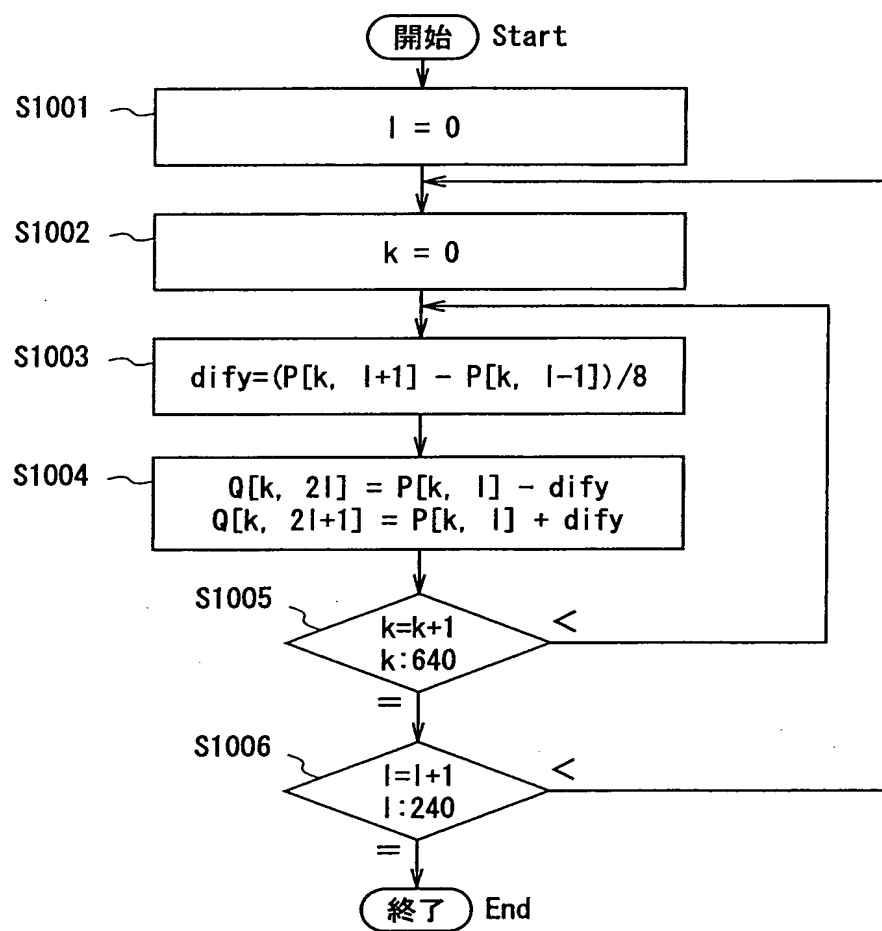


【図11】 Figure 11

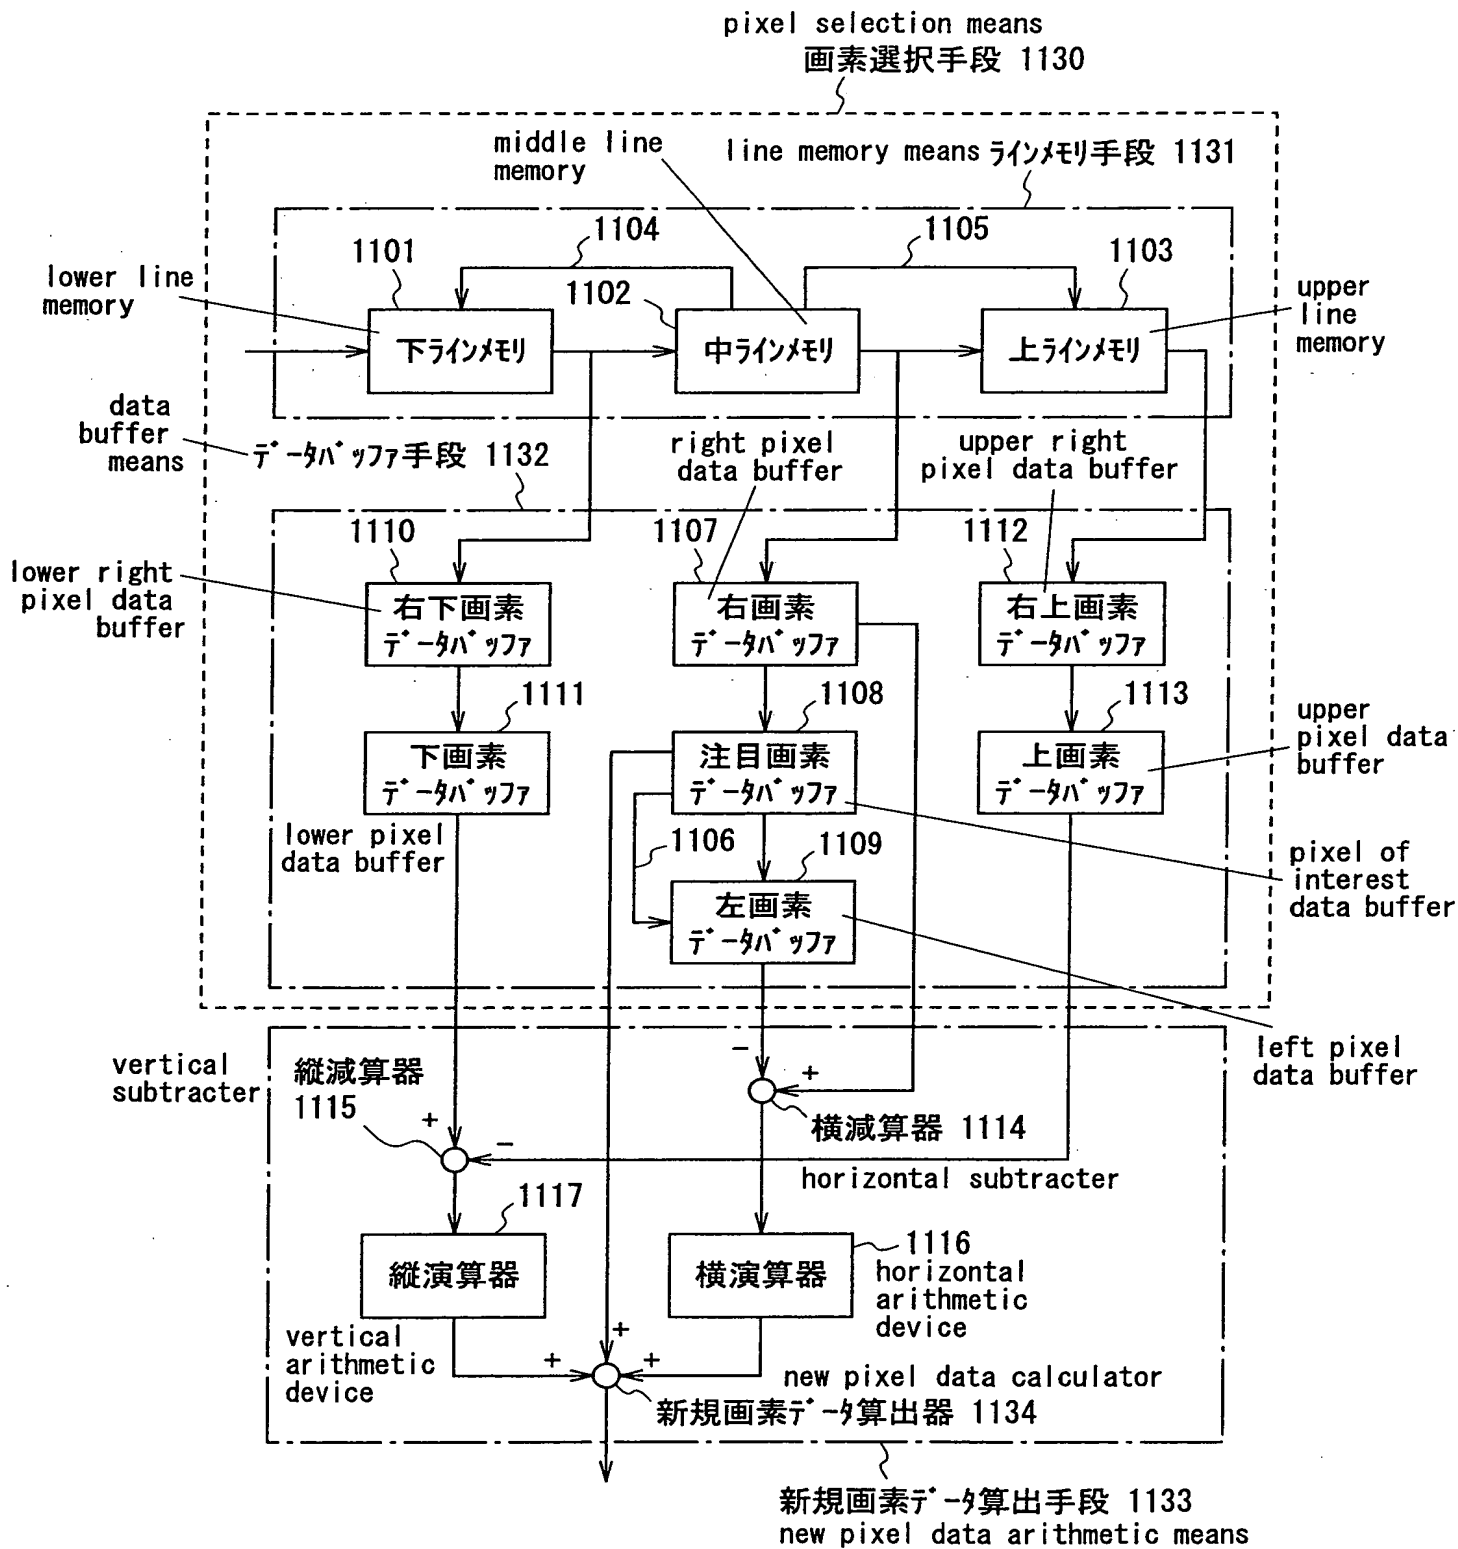

【図12】 Figure 12

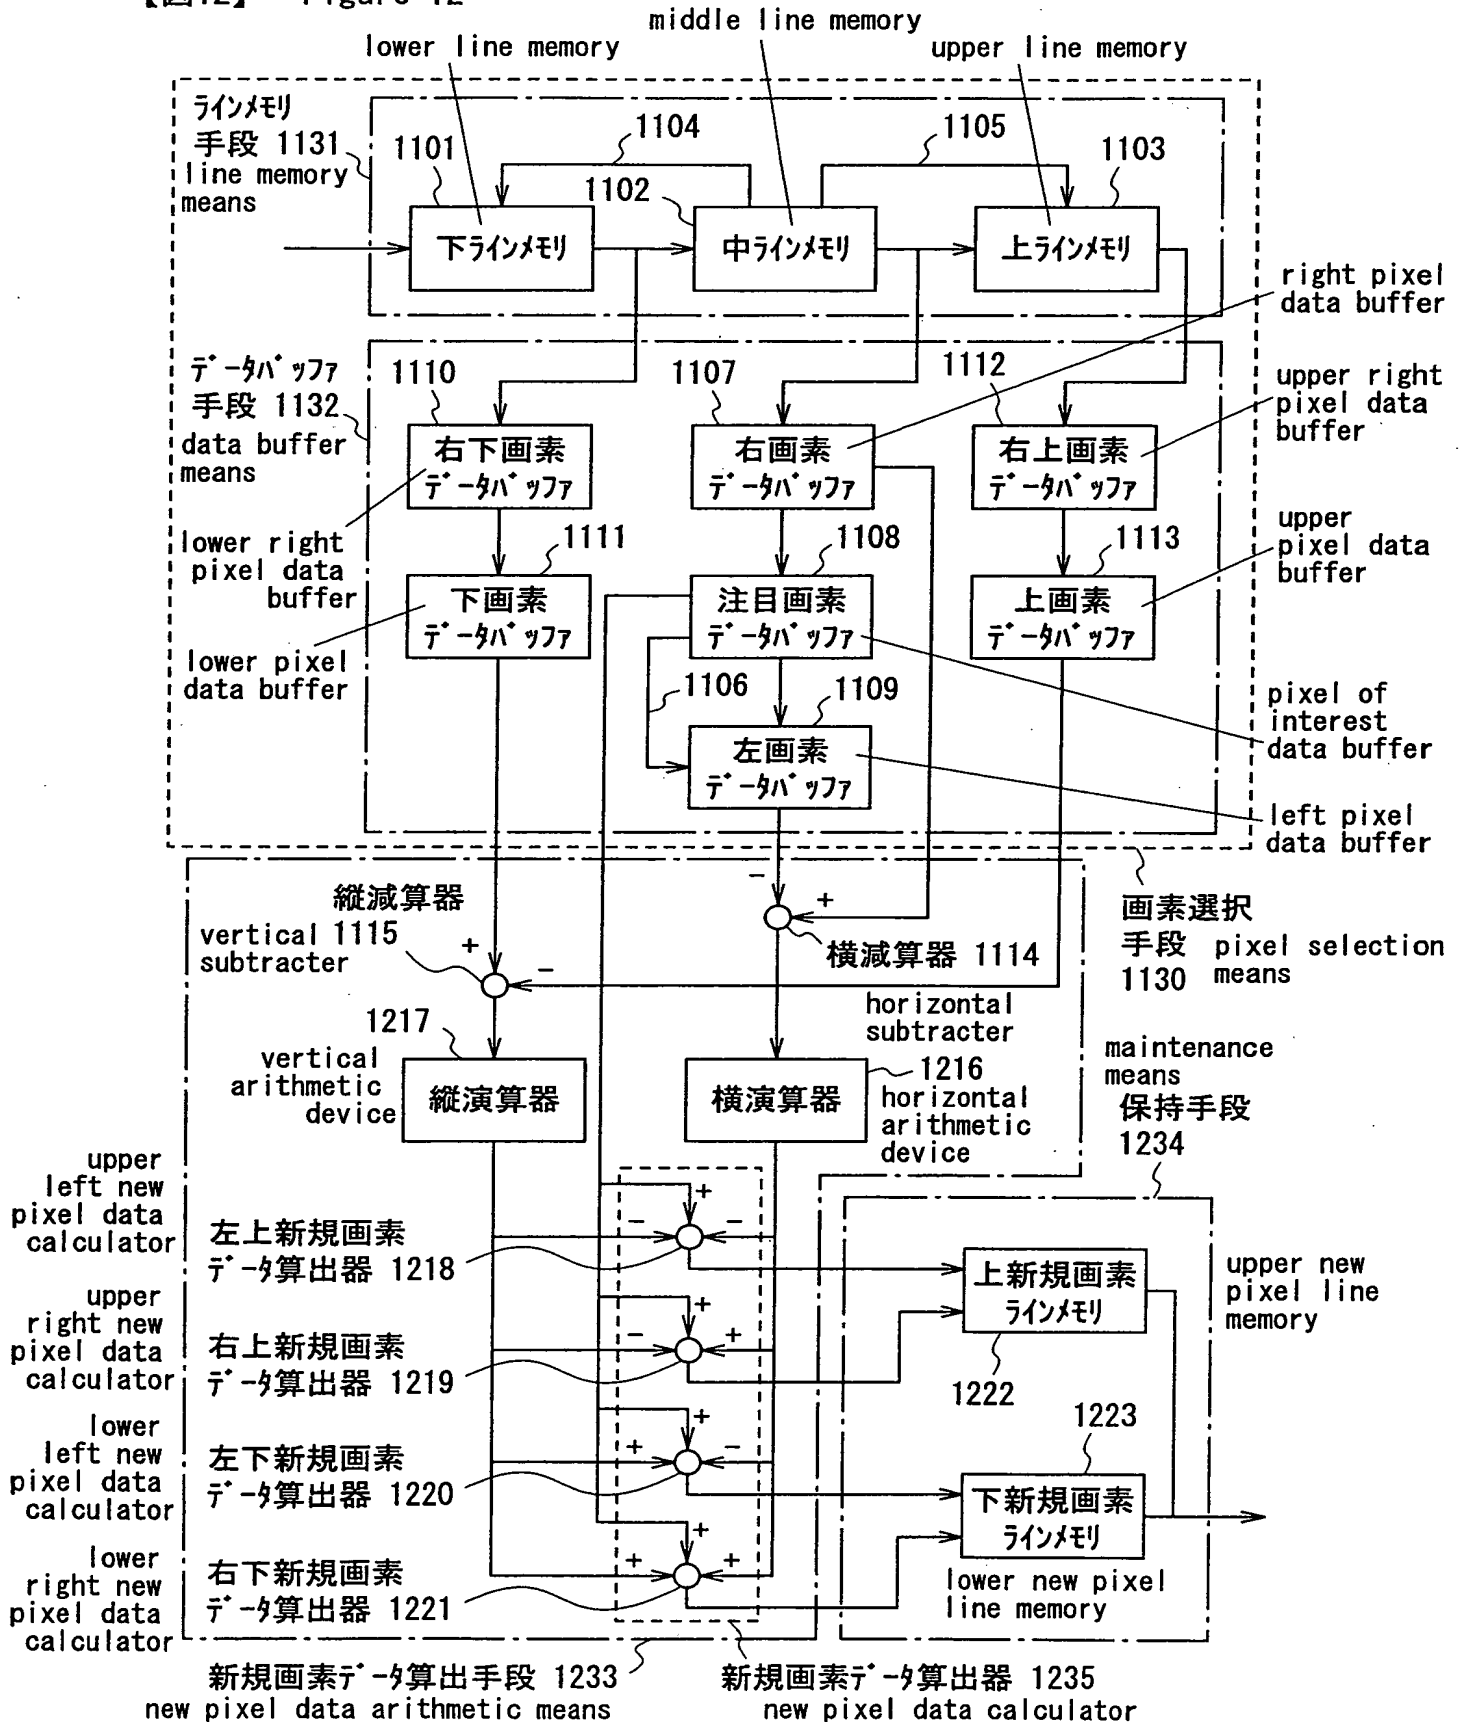

【図13】 Figure 13

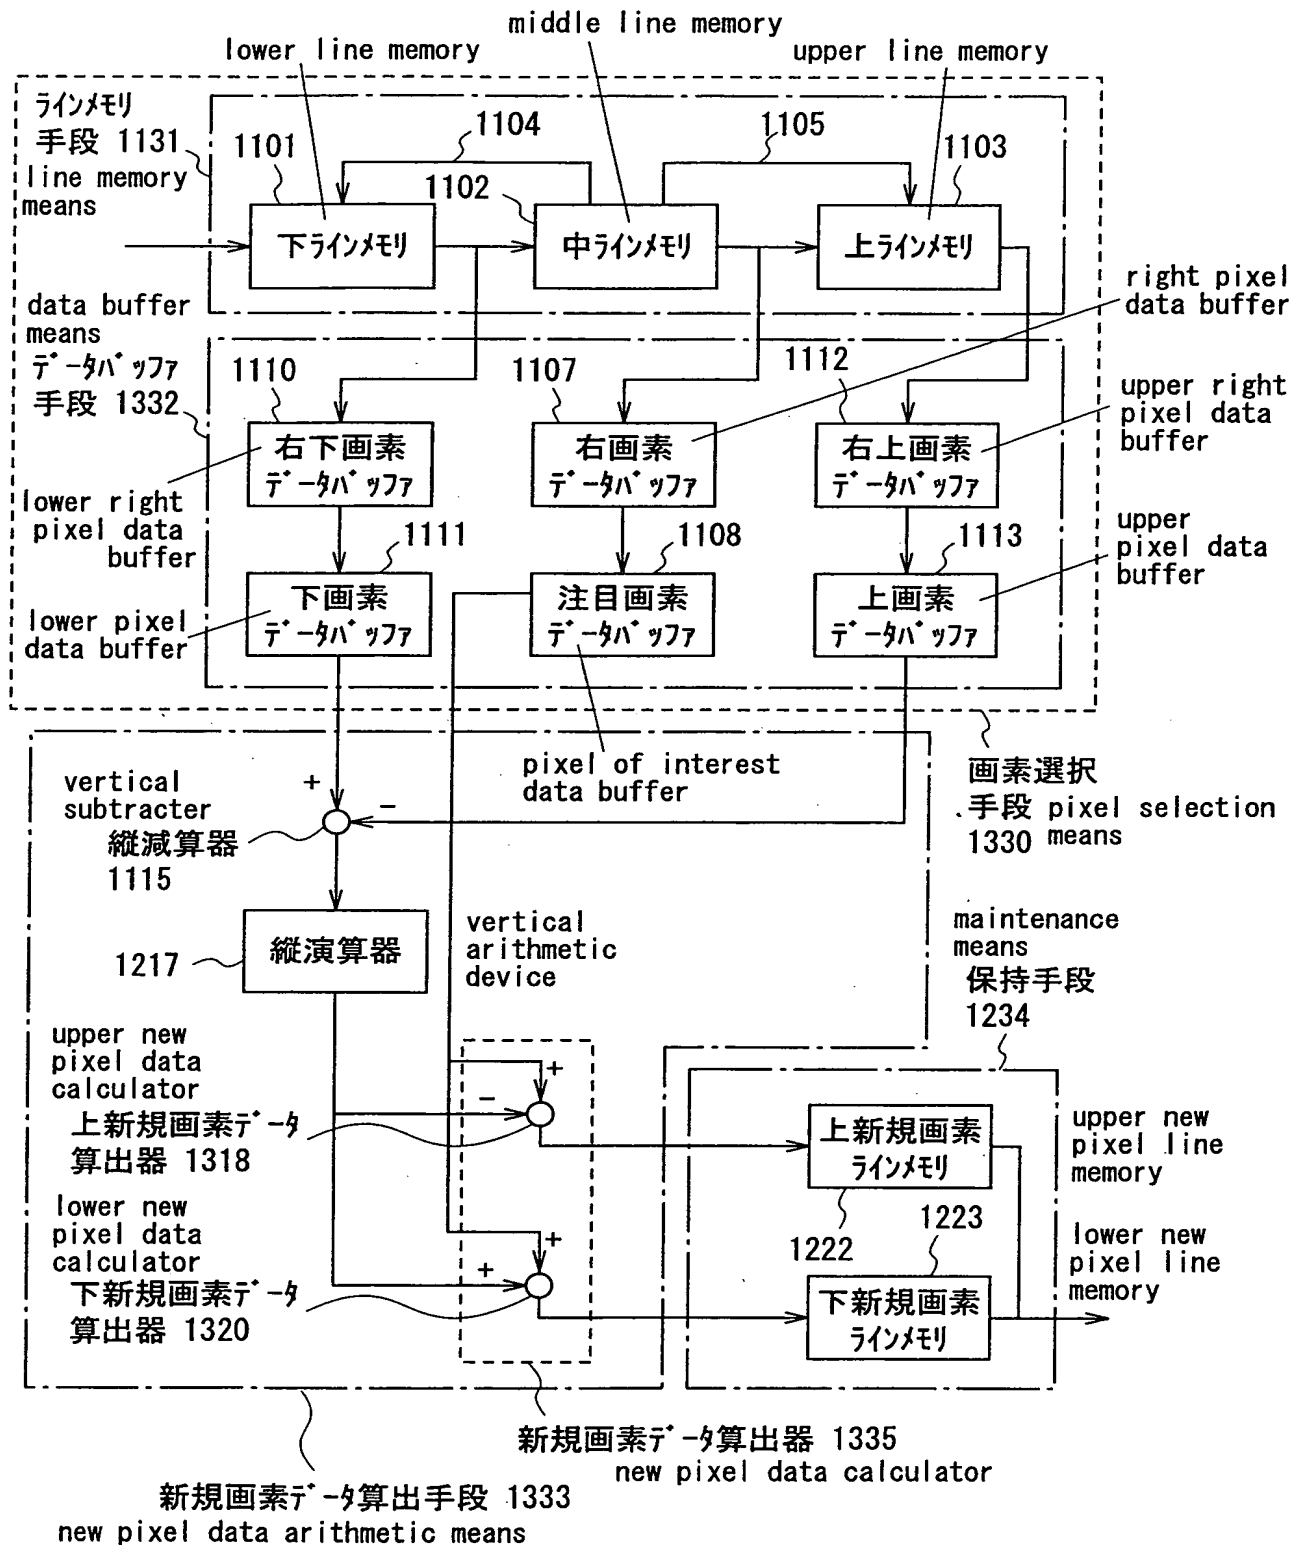



【図14】 Figure 14

